


NET CENTERLINE LENGTH STA. 20+19.75 - 21+28.25 = 108.50 LIN. FT.

BENCH MARKS			
NO.	STATION	DESCRIPTION	ELEV.
0	8+60	P. K. NAIL IN MASONRY MANHOLE 21' RT.	127.27
1	18+24	SPIKE IN 12' MAPLE 40' RT.	93.78
2	23+61	SPIKE IN 20' N. PINE 89' LT.	102.24

DATE _____ BY _____
 SURVEYED _____ PLOTTED _____
 NOTE BOOK GRADES CHECKED _____
 NO. _____
 SURVEYOR'S LICENSE NO. _____
 ENGINEER'S LICENSE NO. _____

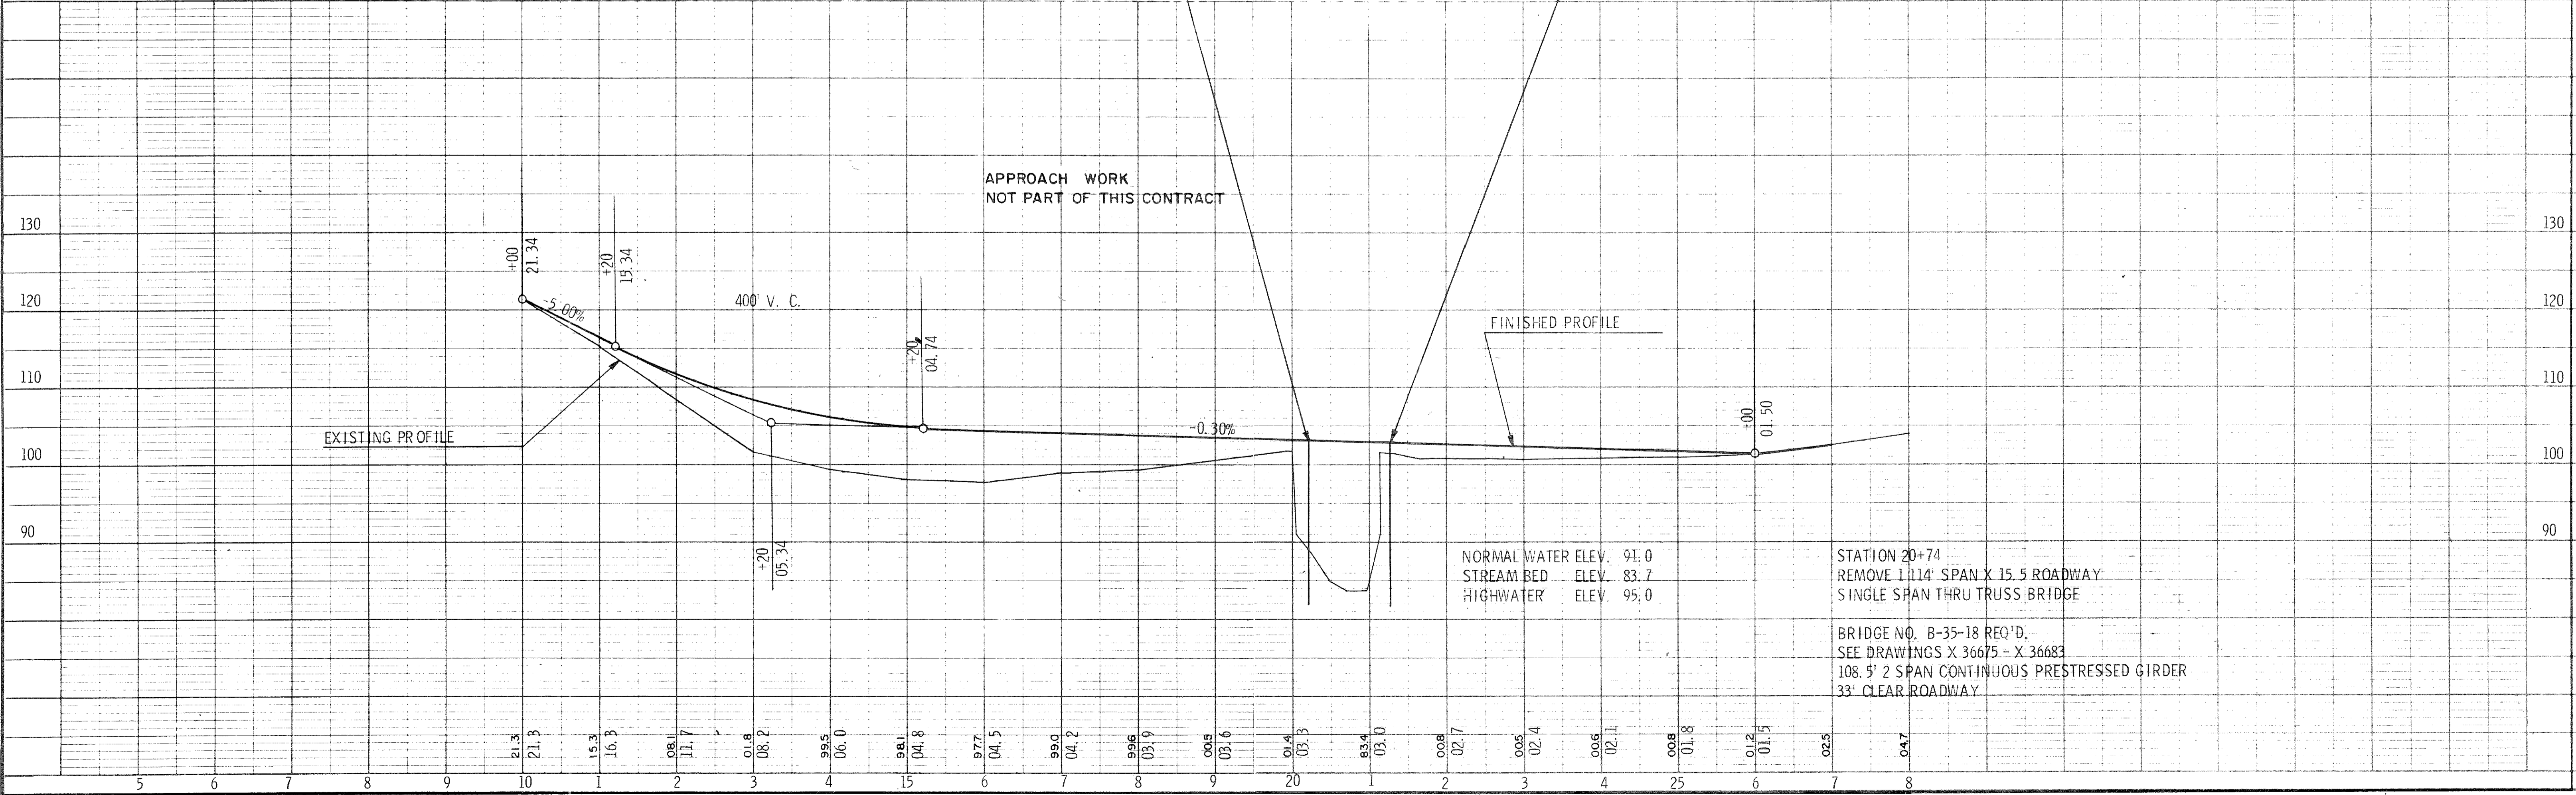

APPROACH WORK NOT PART OF THIS CONTRACT

NORMAL WATER ELEV. 91.0
 STREAM BED ELEV. 83.7
 HIGHWATER ELEV. 95.0

STATION 20+74
 REMOVE 1114' SPAN X 15.5 ROADWAY
 SINGLE SPAN THRU TRUSS BRIDGE
 BRIDGE NO. B-35-18 REQ'D.
 SEE DRAWINGS X 36675 - X 36683
 108.5' 2 SPAN CONTINUOUS PRESTRESSED GIRDER
 33' CLEAR ROADWAY