


PROJECT I.D. 9424-2-70	SHEET NUMBER	TOTAL SHEETS
FEDERAL PROJECT DESIGNATION S 0569 (8)		
Plan & Profile Sta. 170+00 - Sta. 200+00 For C.T.H. "P" Lincoln County		

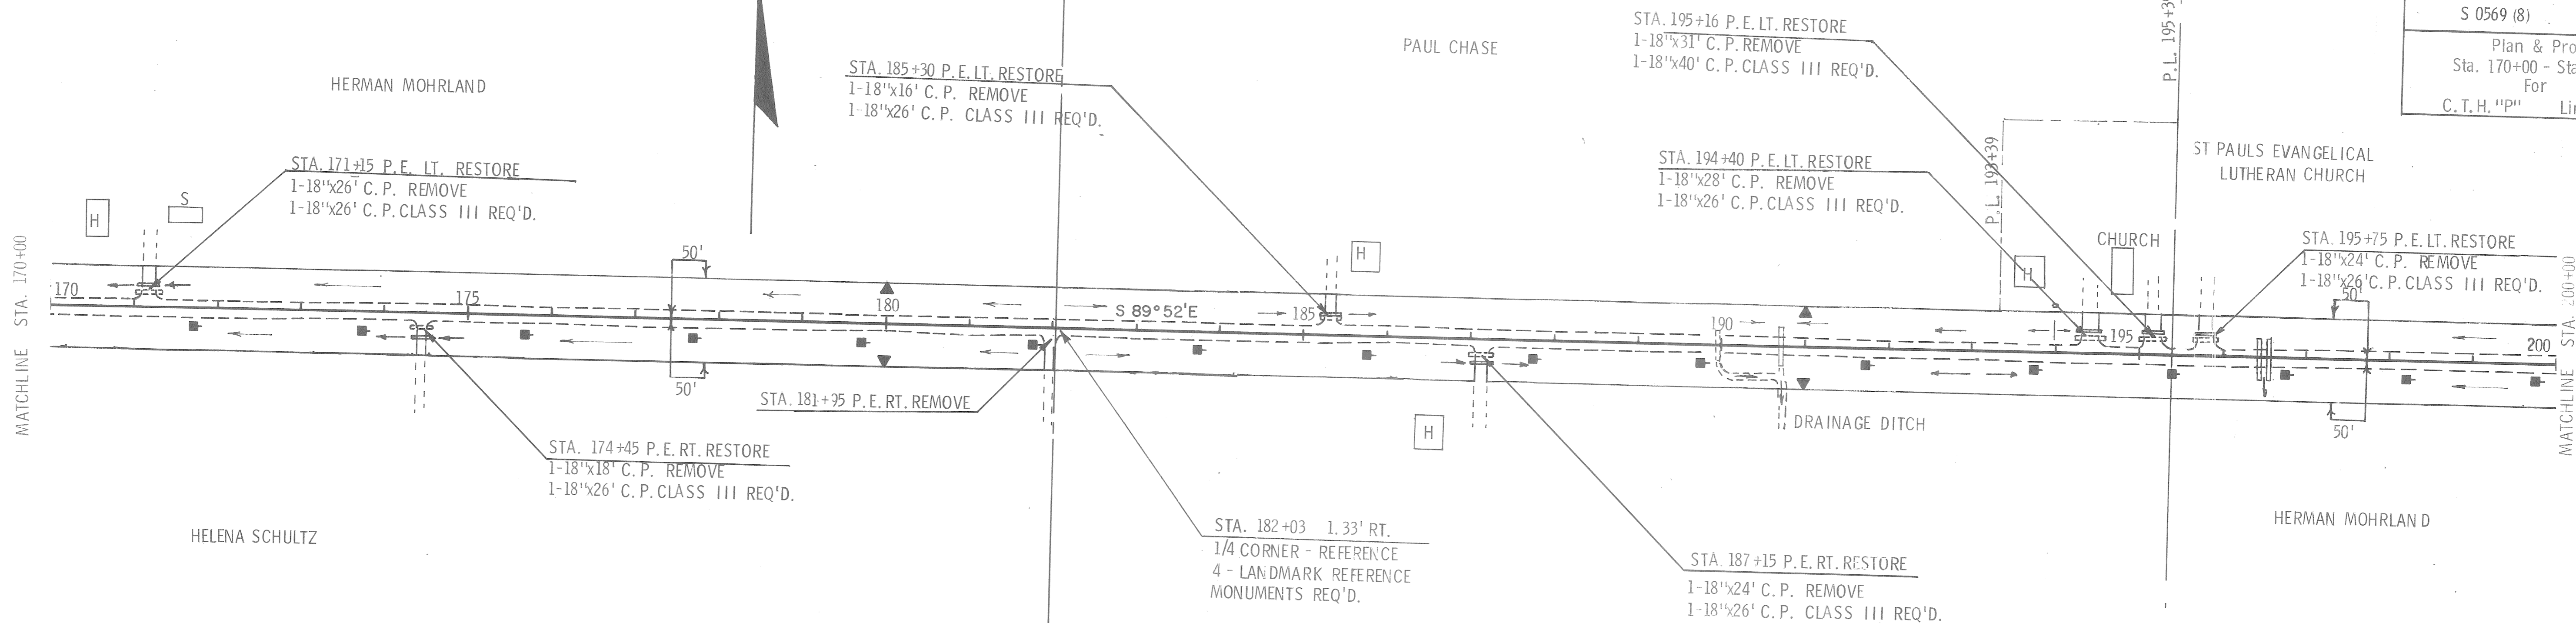

NET CENTERLINE LENGTH STA. 170+00 - STA. 200+00 = 3,000.00 LIN. FT.

BENCH MARKS			
NO.	STATION	DESCRIPTION	ELEV.
18	171+60	SPIKE IN 18" WHITE PINE	55'LT. 1426.86
19	185+85	SPIKE IN 36" POPPLE	33'LT. 1428.62
20	195+25	SPIKE IN 14" WHITE PINE	45'LT. 1424.65
21	209+00	U.S. GEODETIC MARKER - SAN. 1964	150'LT. 1439.50

UNCL. 4,918 CU. YD.
FILL 19,503 CU. YD.
SH G. 30%
BORROW 20,436 CU. YD.

