



ESTIMATE OF QUANTITIES

CONTRACT NO. 1

PROJECT	SHEET NUMBER	TOTAL SHEETS
S0570(8)	2	10

THIS PROJECT IS TO BE EXECUTED UNDER THE STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION OF THE STATE HIGHWAY COMMISSION OF WISCONSIN — EDITION OF 1957
APPROVED AUGUST 9, 1957 AND SPECIAL PROVISIONS AS ATTACHED TO PROPOSALS

STATION TO STATION	NET LENGTH OF CENTER LINE	CLEARING	GRUBBING	EXCAVATION			SAND GRAVEL FILL	FINISHING ROADWAY	OBLITERATING OLD ROAD	GRAVEL OR CRUSHED STONE BASE COURSE	BIT. MATERIAL FOR SURFACE COURSE	CULVERT PIPE				RIP-RAP	GUARD FENCE		MARKER POSTS FOR R/W	MARKER POSTS FOR SURFACE	BIT. ROAD MIX SURFACE	AGGR. FOR BIT. ROAD MIX SURE	TOPSOIL			
				210-1	210-1	210-2						210-3	2110-1	2114-1	2116-1		2203-1	2313-3					2512-1	2523-1	2523-2	2523-3
ITEM NO.	UNIT	LN. FT.		C.Y.	C.Y.	C.Y.	C.Y.	STA.	STA.	C.Y.	GALS.	LN. FT.	LN. FT.	LN. FT.	LN. FT.	C.Y.	LN. FT.	EACH	EACH	SQ. YD.	C.Y.	SQ. YD.	SQ. YD.	CWT.	SQ. YD.	
STA. 3+00 TO STA. 224+82	22063									14,400	76,000										5,440	3,800				

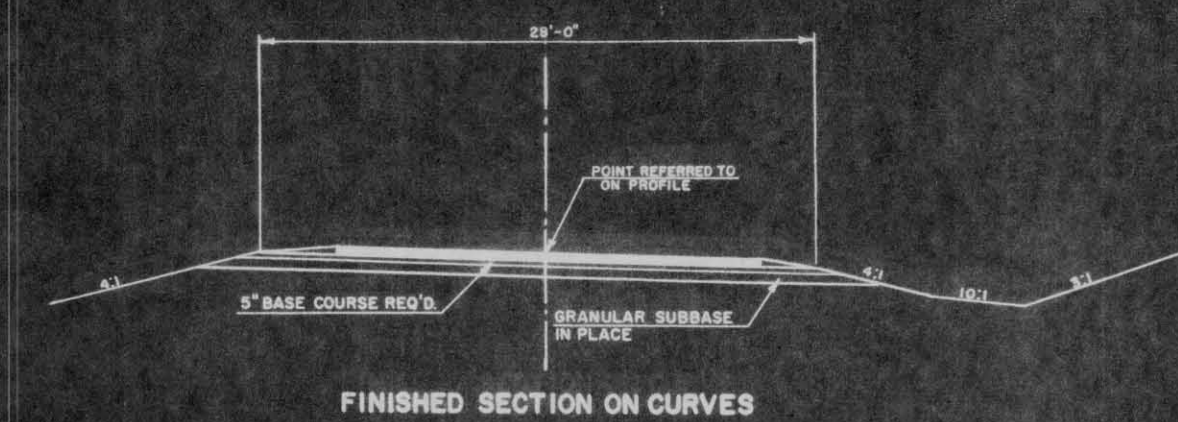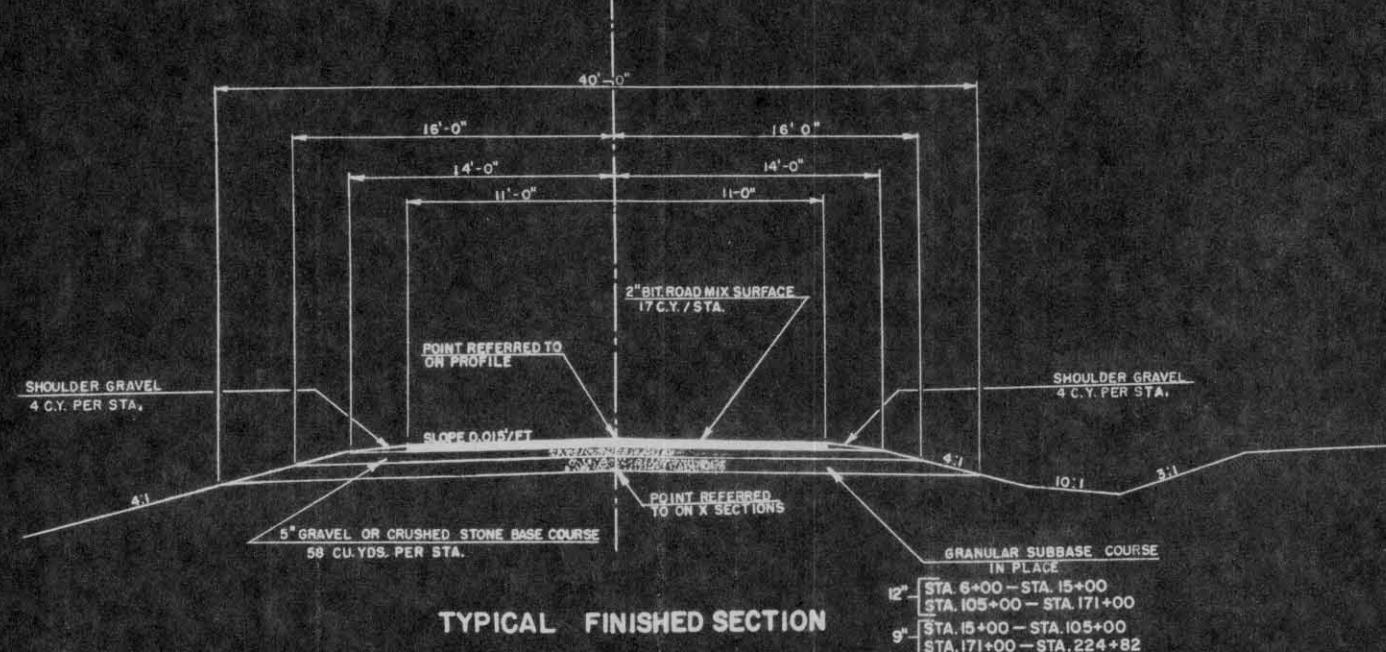

NOTE: SUPERELEVATION TRANSITION OR RUN OFF SHALL BE COMPUTED WITH TWO-THIRDS OF THE TOTAL TRANSITION ON THE TANGENT APPROACH AND ONE-THIRD WITHIN THE CURVE. ALL CROWN TO BE REMOVED FROM SUPERELEVATED SECTIONS EXCEPTING RUN OFF.

GRAVEL OR CRUSHED STONE BASE COURSE		
STATION TO STATION		CU. YDS.
3+00 - 25+19		1287
25+45 - 62+45		2146
62+94 - 192+69		7526
193+13 - 224+82		1838
TWN RDS.	5 AT 50 C.Y.	250
P.E.S.	26 AT 15 C.Y.	390
SHOULDERS		963
TOTAL		14,400

NOTE: SHEETS 3 TO 10 ARE INCLUDED TO SHOW PROFILE AND ALIGNMENT ONLY. OTHER INFORMATION NOT PERTINENT TO THIS CONTRACT.

