
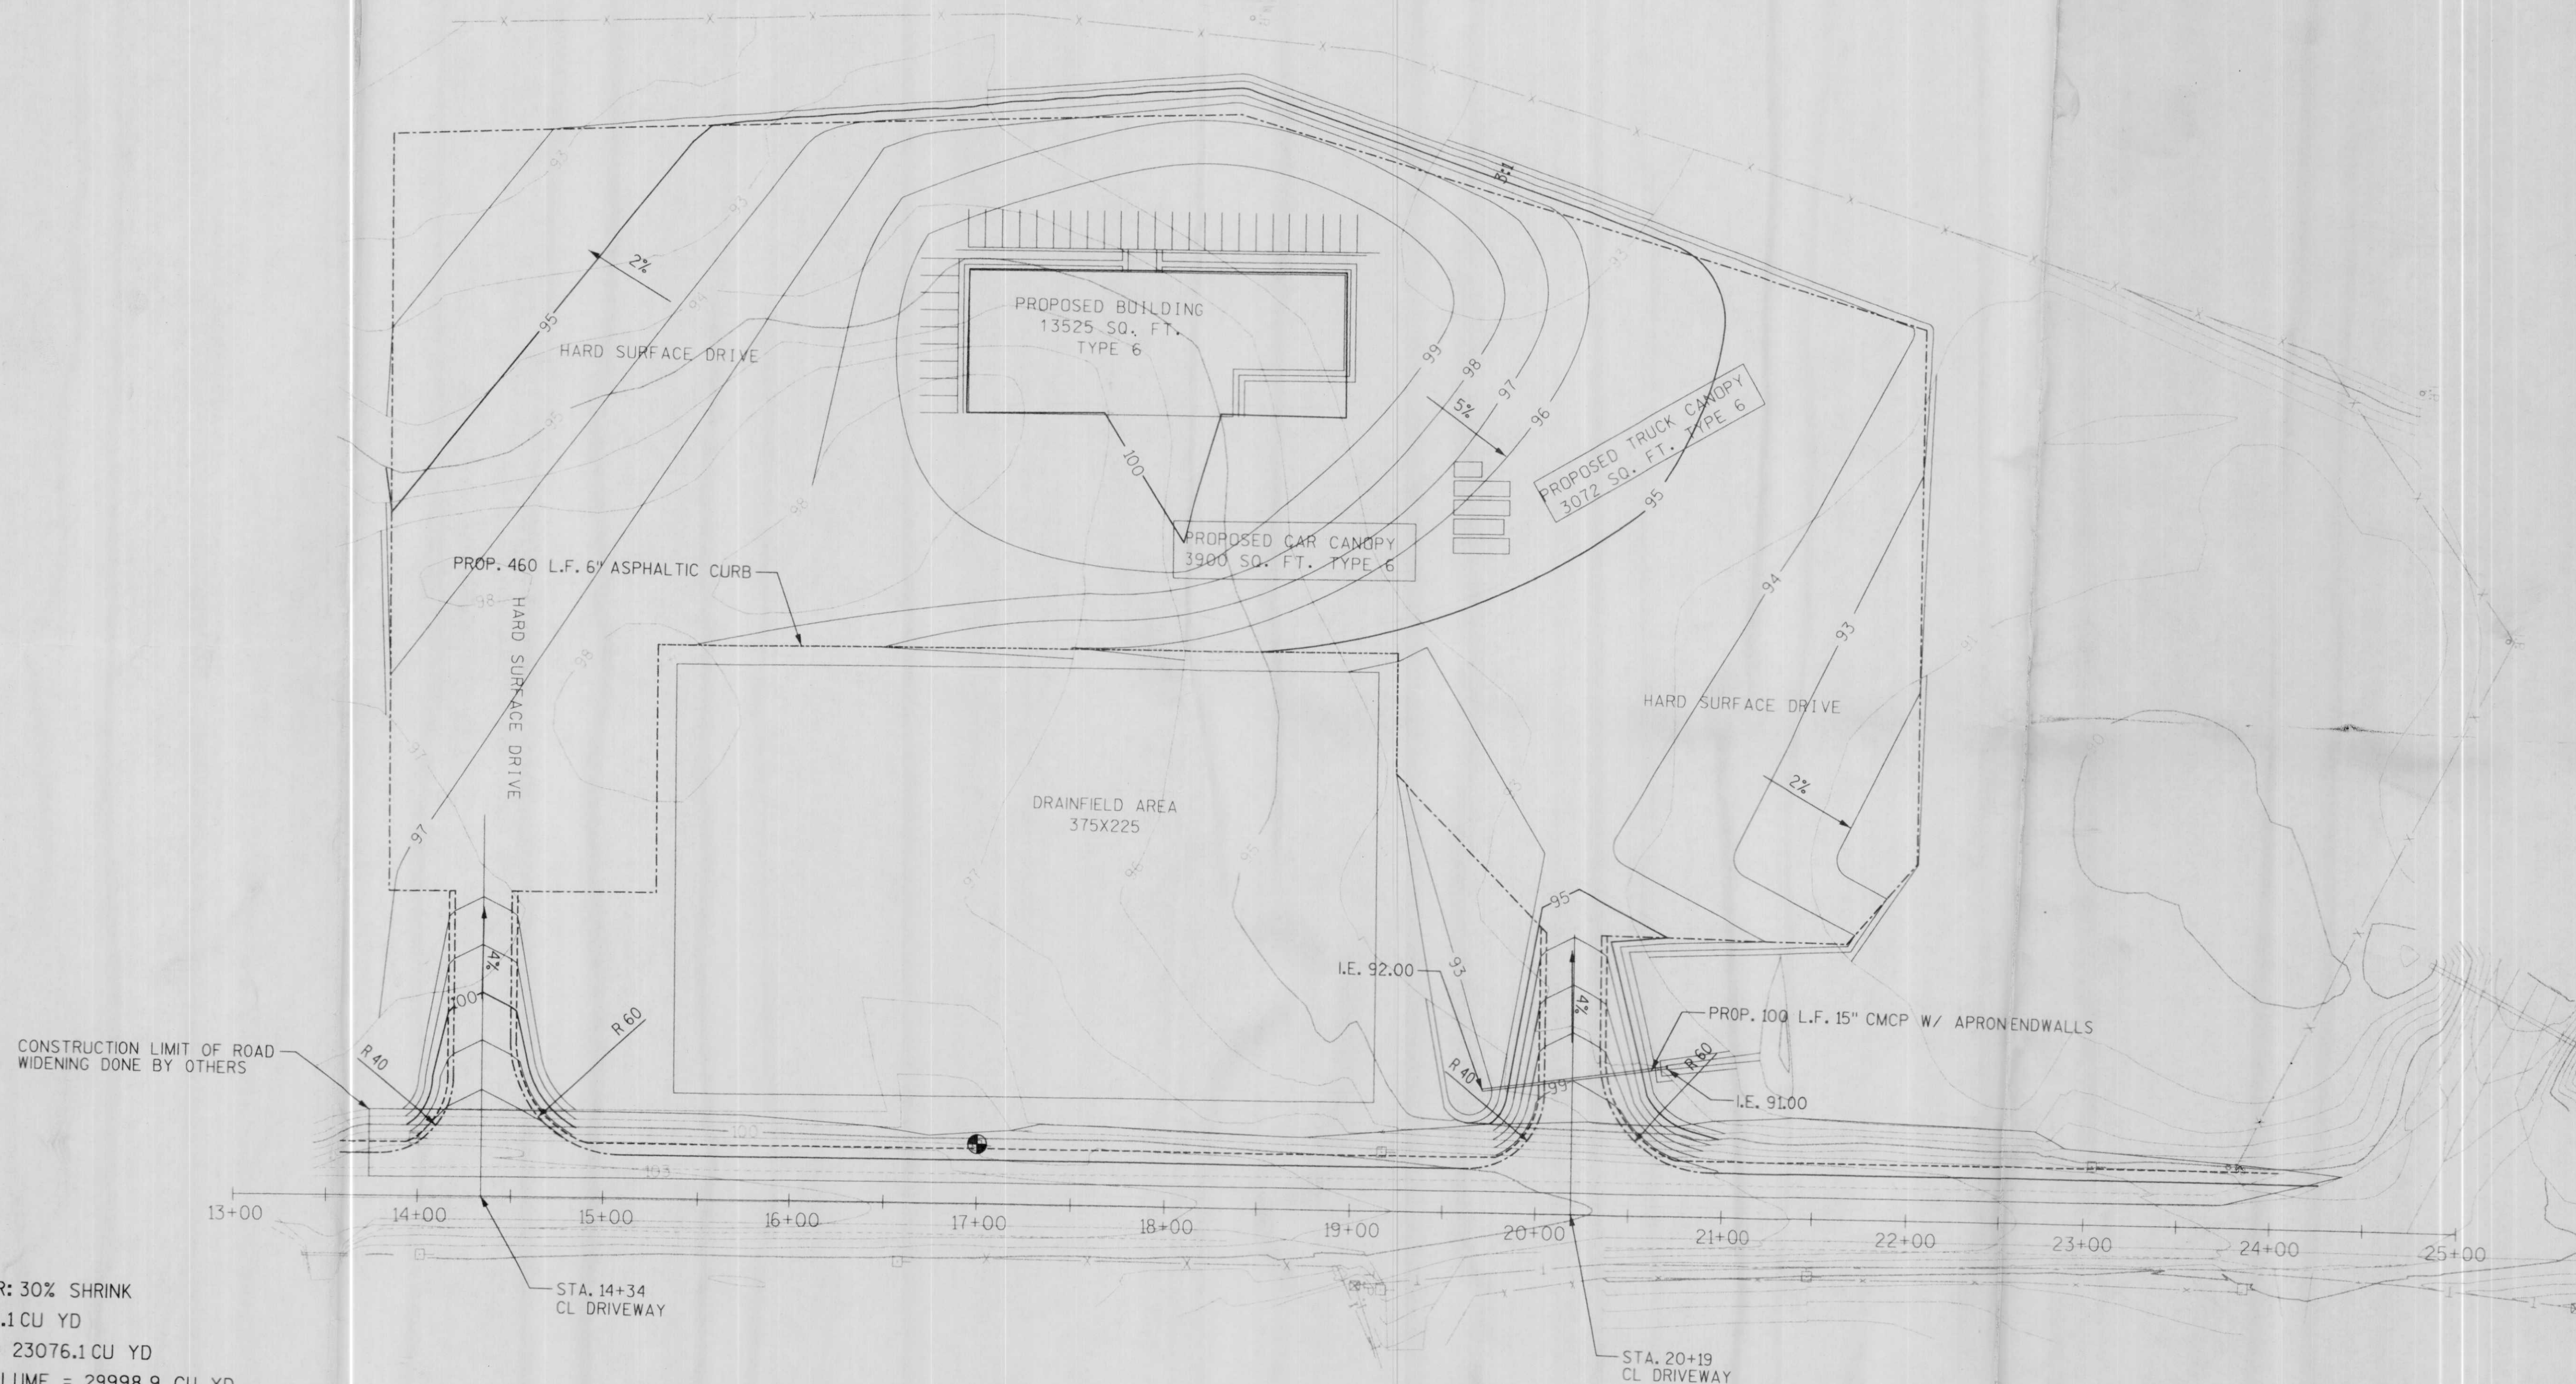


BENCHMARKS

BM. NO.	STATION	DESCRIPTION	ELEV.
1	17+00	16d NAIL IN POWER POLE 30'L.T.	100.00

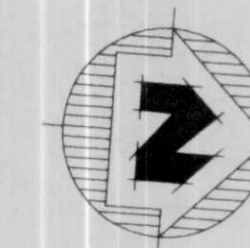

EARTHWORK SUMMARY

FINAL GRADE

COMPACTION FACTOR: 30% SHRINK
 CUT VOLUME = 1328.1 CU YD
 RAW FILL VOLUME = 23076.1 CU YD
 COMPACTED FILL VOLUME = 29998.9 CU YD
 BORROW VOLUME = 28670.8 CU YD

SUBGRADE-ASSUME 12" CABC & 4" ASPHALT

COMPACTION FACTOR: 30% SHRINK
 CUT VOLUME = 4752.4 CU YD
 RAW FILL VOLUME = 17169.4 CU YD
 COMPACTED FILL VOLUME = 17120.1 CU YD
 BORROW VOLUME = 12367.7 CU YD

- NOTE: 1.) DRAINFIELD AREA SHALL NOT BE DISTURBED. NO EQUIPMENT MAY BE DRIVEN OR STORED ON DRAINFIELD AREA.
 2.) TOWN ROAD ON EAST SIDE OF SITE TO BE WIDENED BY OTHERS.

LEGEND

- EXIST CONTOUR INDEX
- EXIST CONTOUR INTER.
- PROPOSED CONTOUR INDEX
- PROPOSED CONTOUR INTER.
- PROPOSED EDGE OF PAVEMENT
- PROPOSED ASPHALTIC CURB
- PROPOSED EDGE OF GRAVEL



Scott D. Martin
 9/25/94

MSA
 MID-STATE ASSOCIATES, INC.
 Engineers, Architects, Planners, Surveyors, Scientists
 1835 N. Stevens St., Tomahawk, WI 54687 (715-382-3244)
 © 1994 MID-STATE ASSOCIATES

PROJECT NO.: 989435	DATE: SEPT. 1994	SCALE: 1"=50'
FILE NO.: 989435	DATE: 9-29-94	
DRAWN BY: PJK	CHECKED BY: SM	
SITE PLAN AND GRADING PLAN HIGHWAY "51" SELF SERVICE SITE PLAN MERRILL, WISCONSIN		
FILE NO.	SHEET	1 of 2