U.S. PUBLIC LAND SURVEY MONUMENT RECORD


This form is intended and designed to fulfill all requirements of Wisconsin Administrative Code, Note: Chapter A-E 5.02, U.S. Public Land Survey Monment Record (3) (a) (b) (c) (d) (e) (f) (g) (h) (I). An additional sheet may be added if necessary to conform with said requirements.

(a)	Corner	location:	Township	32	North
					1101 (1

Range ____4 East

CORNING Town/City/Village ___

County ___ Lincoln



30

Section

(b) (f) (g) (h) Description of monument found at this corner and if it was accepted, state all evidence (material, testimonial, occupational, plats, records, other monuments) used as a basis for accepting. If not accepted or if nothing was found, state evidence used as a basis for establishing location. If reestablished through lost corner proportionate methods, indicate all monuments, distances and directions used to establish.


Original survey done by William Daugherty in 1862. Set wood post with bearing trees:
9" Sugar Maple N85'E, 14 lks.
10" Birch S53'W, 30 lks.

Revisited by William Stuth in March, 1975. Survey done for Owens-Illinois with Section Summary done. Iron pipe in corner position, (did not state whether it was found or set.)

Revisited again in March, 1998 by David Lemke. Found no evidence above or below the surface.

Found a 1-1/2"iron pipe along the Northerly right-of-way line of Co. Rd. "M". Connected North 1/4 corn with found iron pipe and extended the line 33.00 feet to the south, checked distances with survey done by Stuth. Distances were consistant. Set SN-1 noil for corner with (4) 7/8" rebars with Lincoln County caps as witness monuments approx. 2 feet from bearing trees. Connected North 1/4 corner

(c) (d) (e) Plan view of corner with ties to at least 4 witness monuments. If in disagreement with previously established corner, show the distances between the two corners and also indicate the ties to the disputed corner.

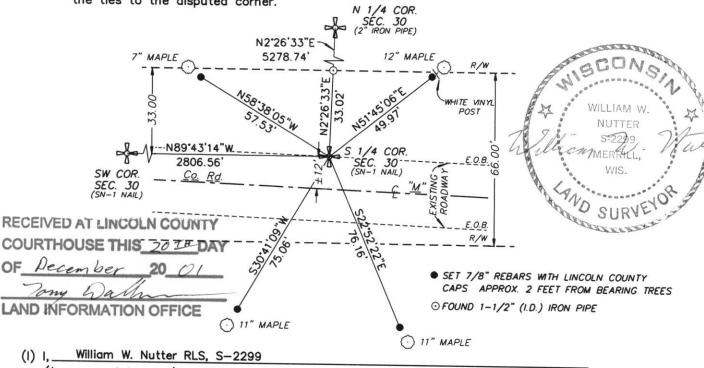

(type or print name) certify that the corner location on this record was determined by me or under my direction and control and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.

Signature

(revised 2/97)

U.S. PUBLIC LAND SURVEY MONUMENT RECORD

Note: This form is intended and designed to fulfill all requirements of Wisconsin Administrative Code,

Chapter A-E 5.02, U.S. Public Land (I). An additional sheet may be add	Survey Monument Record	I (3) (a) (b) (c) (d) (e) (f) (g) (h) with said requirements.
(a) Corner location: Township32	North	N
Range4	East	
Town/City/VillageTN. OF CORNING		7
CountyLincoln		
		Section
(b) (f) (g) (h) Description of monument four (material, testimonial, occupational, accepting. If not acceptted or if not establishing location. If reestablished monuments, distances and direction	plats, records, other monu hing was found, state evide ed through lost corner prop	ments) used as a basis for ence used as basis for
TIE SHEET AND SECTION SUMMA SHOWS CORNER POSITION BUT N FOUND NO EVIDENCE OF CORNER	O SET.	
(c) (d) (e) Plan view of corner with ties to a previously established corner, show the ties to the disputed corner.	t least 4 witness monumen the distances between the	ts. If in disagreement with two corners and also indicate
DECEMEN AT LINCOLN COLINEY		
COURTHOUSE THIS 24 DAY		HALLECONS CONSTRUCTION
OF april 19 98		DAVID L.
TAX DESCRIPTION OFFICE	1 1 1 2 2 3 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4	LEMKE S-1845 TOMAHAWK WI
DAVID L. LEMKE S-1845		NO SURVEYOR BURNEY
(type or print name) certify that the corner by me of under my direction and control Monument Record is correct and comple	and that this U.S. Public La	and Survey
Monument Record is correct and comple	O 1998	edge and belief.
Signature	Date	. 1
(marked 0.07)		I.