U.S. PUBLIC LAND SURVEY MONUMENT RECORD

NOTE: THIS FORM IS INTENDED AND DESIGNED TO FULFILL ALL REQUIREMENTS OF WISCONSIN ADMINISTRATIVE CODE, CHAPTER A-E 7.08, U.S. PUBLIC LAND SURVEY MONUMENT RECORD (3)(a)(b)(c)(d)(e)(f)(g)(h)(i). ADDITIONAL SHEETS MAY BE NECESSARY TO CONFORM TO SAID REQUIREMENTS.


(a) CORNER LOCATION:

SOUTH 1/4 CORNER, SECTION 12 TOWNSHIP 33 NORTH RANGE 6 EAST TOWN OF ROCK FALLS LINCOLN COUNTY WISCONSIN

(b) HISTORY OF ORIGINAL CORNER:

ORIGINAL SURVEYOR: See Previous Tie Sheet COMMENCING DATE: COMPLETION DATE: ORIGINAL BEARING TREES:

T 33 N, R 6 E



(f)(g)(h) DESCRIPTION OF MONUMENT FOUND AT THIS CORNER AND IF IT WAS ACCEPTED. STATE ALL EVIDENCE (MATERIAL, TESTIMONIAL, OCCUPATIONAL, PLATS, RECORDS, OTHER MONUMENTS) USED AS A BASIS FOR ESTABLISHING LOCATION. IF RE-ESTABLISHING THROUGH LOST CORNER PROPORTIONATE METHODS, INDICATE ALL MONUMENTS, DISTANCES, AND DIRECTIONS USED TO ESTABLISH. INDICATE TYPE OF MONUMENTS FOUND OR SET.

1961, P.M. Johnson, set 2 Iron Witness Posts.

11/13/2023, I, Anthony R. Dallman, PLS-2405, found both Iron Witness Posts and set an SNM-1 Berntsen Monument, at midpoint between them, 1' North of centerline. I accepted this location and set witness monuments. as shown in the sketch below, to further perpetuate the corner location.

(c)(d)(e) PLAN VIEW OF THE CORNER WITH TIES TO AT LEAST FOUR WITNESSES. IF IN DISAGREEMENT WITH PREVIOUSLY ESTABLISHED CORNER, SHOW THE DISTANCES BETWEEN THE TWO CORNERS AND

S

N

.89 Ш

ALSO THE TIES TO THE DISPUTED CORNER. 10" Oak Tie bearings by hand-held compass. - Tie distances by steel tape. - Not to scale. 33.89 No County Road J

- ⊗ Found 7/8" Capped
- 2" O.D. Iron Pipe (Existing)
- Set 3/4" Capped Rebar

I, ANTHONY R. DALLMAN, WISCONSIN PROFESSIONAL LAND SURVEYOR, S-2405, HEREBY CERTIFY THAT THE CORNER LOCATION ON THIS RECORD WAS REFERENCED BY ME OR UNDER MY DIRECTION AND CONTROL AND THAT THIS U.S. PUBLIC LAND SURVEY MONUMENT RECORD IS COMPLETE TO THE BEST OF MY KNOWLEDGE AND BELIEF.

Withrest ANTHONY R. DALLMAN, PLS S-2405 02/16/24

INDEX NO.


1-23









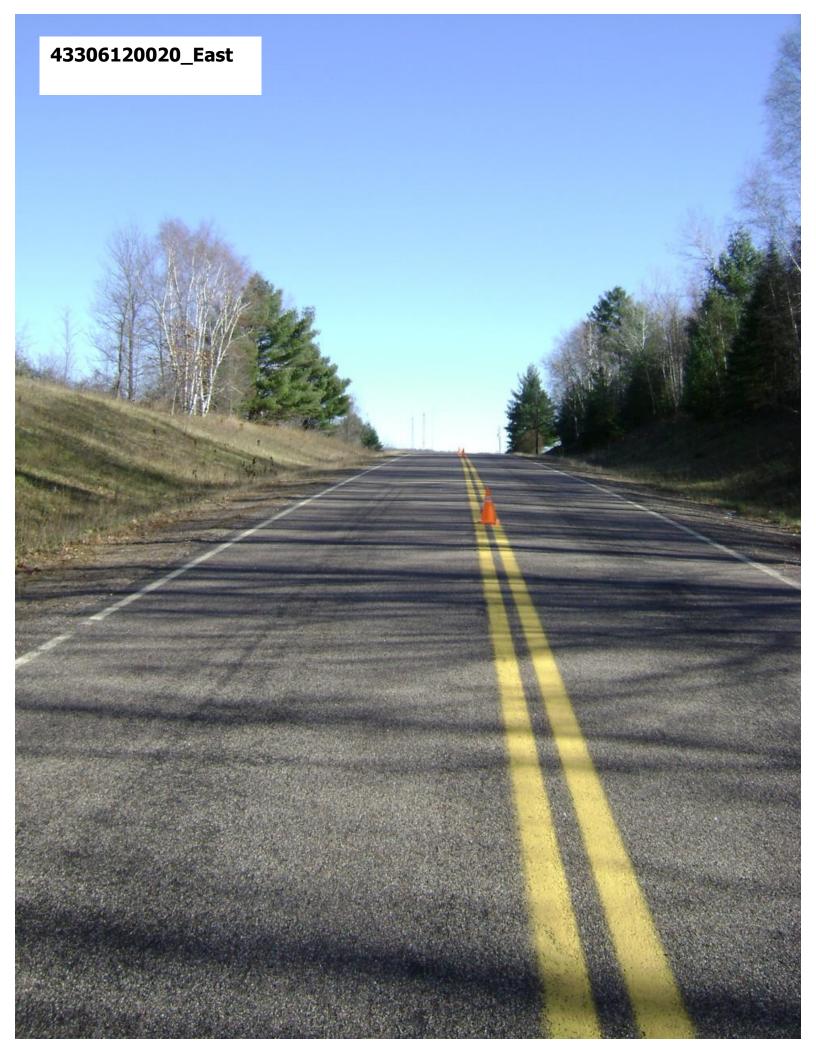

0 0 0 0	0 0 0 0
PRESERVATION OF LANDMAR	KS PAGE
SECTION 59,635(7) WISCONSIN STATE COUNTY LINCOLN TOWN ROCK FACE HIGHWAY GTH J' SECTION NO.S 1Z \$ 13 T. 33 N., R & E. TYPE OF LANDMARK 1/4 CORNE LOCATION INDICATED ON SKETCH	- 13
This seed find a seed field and	2" Iron witness post 33.0 FT 118+54.8 HWY STATIONING 33.0 FT 2" Non witness post s or ties to the above described lendmarks
Field notes or records filed in book no. at the WithC., Dist. No. City of Rhinalandar Located or established by PM Jo	Form 710 on file office. Onaida County, hnson 1961
County Clerk's Office	County, Wis.}ss

County Clerk

000000000	
PRESERVATION OF LANDMARKS	
SECTION 59,635(7) WISCONSIN STATUTES COUNTY LINCOLN TOWN ROCK FALLS HIGHWAY CTH 'J' SECTION NOS 1Z & 13 T. 33 N., R & E. TYPE OF LANDMARK 1/4 CORNER LOCATION INDICATED ON SKETCH X LOCATION SKETCH	
Z" won witness post 116+548 HWY STATIONING 33.0 FT 2" won witness post This space for copy of field notes or ties to the above described landmarks	
Field notes or records filed in book no. Form 710 on file. at the W.H.C., Dist. No. 7 office.	Index
Located or established by PM Johnson	i No.
County Clerk's Office County, Wis.}ss Received for record, 19, 19, 19	52.5

County Clerk

0000	0	0	0	0	0
PRESERVATION OF LAN	NDMARKS		12 -	PAC	<u> </u>
SECTION 59,635(7) WISCONSISCOUNTY LINCOLN TOWN ROCK FALLS HIGHWAY CTH "J" SECTION NO.S IZ & I3 T. 33 N., R & E. TYPE OF LANDMARK 1/4 LOCATION INDICATED ON S	CORNER	LOCAT	ION SI	KETCH	
This space for copy of	33 N 50 W (MAG)	TIE+ 59 HWY 3	4.8 TATIOI	SING	
Field notes or records filed in at the W.H.C., Dis City of Rhinglandar	book no. Form t. No. 7	710 on	7.	offic — Count	track 10
County Clerk's Office	Title_E	nginaci _County,		-, 13	
Received for record	Copy sent to Cou	_, 19	- 1	,/	9

County Clerk









