U.S. PUBLIC LAND SURVEY MONUMENT RECORD

NOTE: THIS FORM IS INTENDED AND DESIGNED TO FULFILL ALL REQUIREMENTS OF WISCONSIN ADMINISTRATIVE CODE, CHAPTER A-E 7.08, U.S. PUBLIC LAND SURVEY MONUMENT RECORD (3)(a)(b)(c)(d)(e)(f)(g)(h)(i). ADDITIONAL SHEETS MAY BE NECESSARY TO CONFORM TO SAID REQUIREMENTS.

(a) CORNER LOCATION:

WISCONSIN

SOUTH QUARTER CORNER, SECTION 23
TOWNSHIP 34 NORTH
RANGE 5 EAST
TOWN OF TOMAHAWK
LINCOLN COUNTY


(b) HISTORY OF ORIGINAL CORNER:

ORIGINAL SURVEYOR: Jackson L. Prentice, Set Post

COMMENCING DATE: January 6, 1855 COMPLETION DATE: January 12, 1855

ORIGINAL BEARING TREES:

12" Pine; N 46° E; 6 links 10" Soft Maple; S 4° W; 14 links



T 34 N. R 5 E

(f)(g)(h) DESCRIPTION OF MONUMENT FOUND AT THIS CORNER AND IF IT WAS ACCEPTED. STATE ALL EVIDENCE (MATERIAL, TESTIMONIAL, OCCUPATIONAL, PLATS, RECORDS, OTHER MONUMENTS) USED AS A BASIS FOR ESTABLISHING LOCATION. IF RE-ESTABLISHING THROUGH LOST CORNER PROPORTIONATE METHODS, INDICATE ALL MONUMENTS, DISTANCES, AND DIRECTIONS USED TO ESTABLISH. INDICATE TYPE OF MONUMENTS FOUND OR SET.

2/28/2023, I, Anthony R. Dallman, PLS-2405, set a 30" Berntsen Swamp Rod, up 8", at proportioned position. I accepted this location and set witness monuments, as shown in the sketch below, to further perpetuate the corner location.

(c)(d)(e) PLAN VIEW OF THE CORNER WITH TIES TO AT LEAST FOUR WITNESSES. IF IN DISAGREEMENT WITH PREVIOUSLY ESTABLISHED CORNER, SHOW THE DISTANCES BETWEEN THE TWO CORNERS AND ALSO THE TIES TO THE DISPUTED CORNER.


- Tie bearings by hand-held compass.

SURVEYOR, S-2405, HEREBY CERTIFY THAT THE CORNER LOCATION ON THIS RECORD WAS REFERENCED BY ME OR UNDER MY DIRECTION AND CONTROL AND THAT THIS U.S. PUBLIC LAND SURVEY MONUMENT RECORD IS COMPLETE

TO THE BEST OF MY KNOWLEDGE AND BELIEF.

ANTHONY R. DALLMAN, PLS S-2405

- Tie distances by steel tape.
- Not to scale.

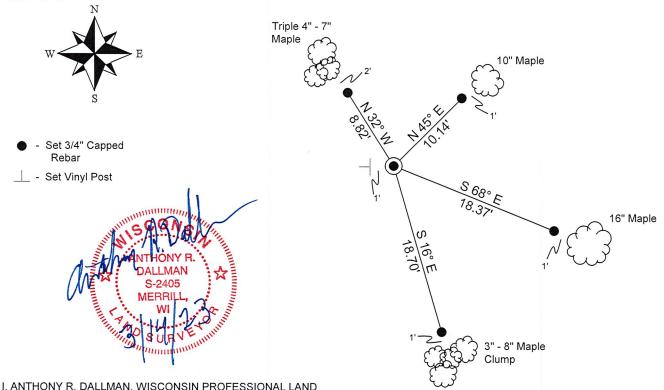

43405230020

INDEX NO. Q-19









