


T3YN RYE

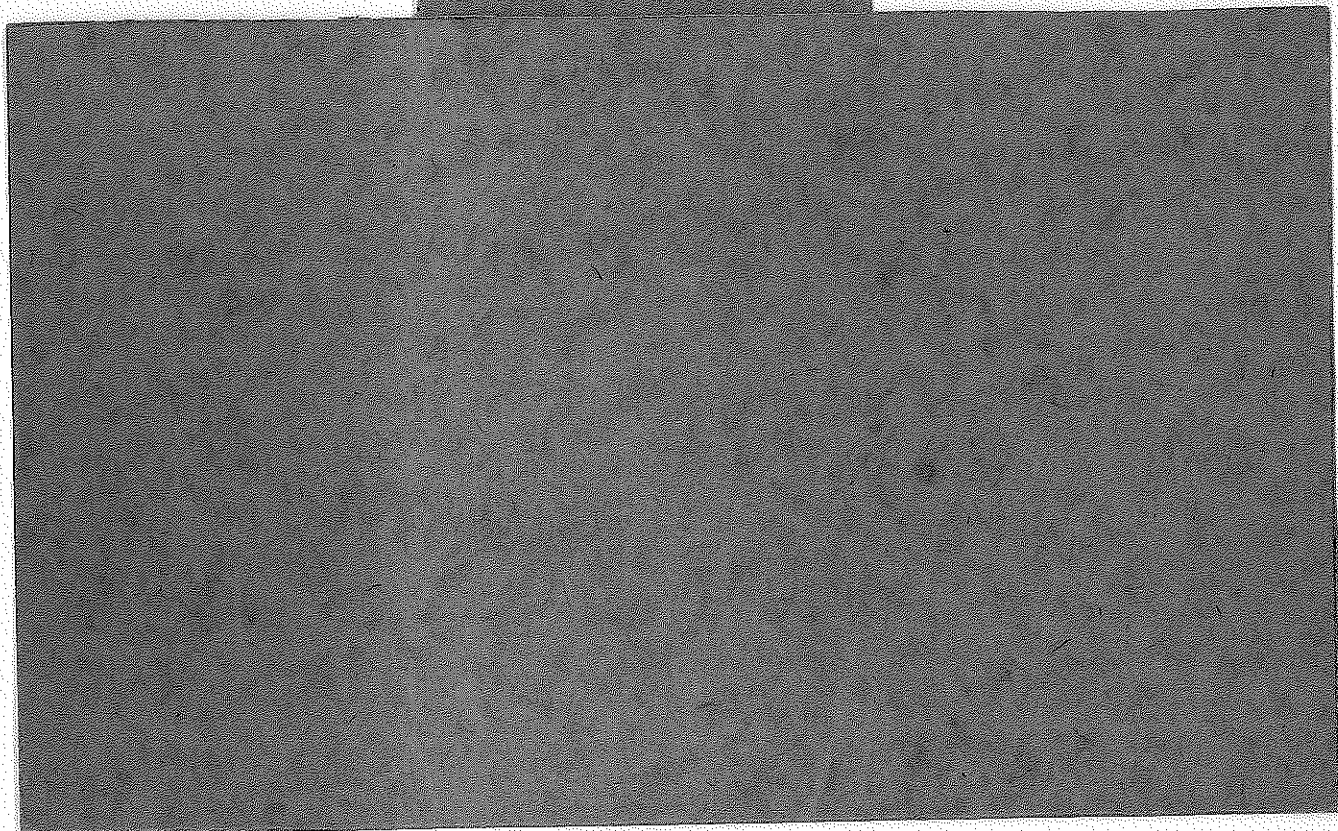

34-4

Steve

Jim

Kevin

2-3-93

North from T 1/4 between 30 & 29

000 - T 1/4 corner

356.25'

1302.36'

1963.82'

2523.74

2638.458' set T section corner 19-20-29  
-30

In LRA just N of cedars

set cedar post .60' NE of  
section corner nail - also picket

2-4-93

Jerry

Jim

Kevin

000 - AR 175,5251 North from T  
sec cor

12,042.9'

1394 old freeze road E & W

2096.14'

2638.0785' set 1/4 corner  
Tamaack Hub with nail

3073.20' Ash Stump

4030.00' center of river approx

4056.33' Turned Def < rt 0°-06'

a distance of 1227.62

to section corner

2.5' East to cornerstone from line

In Penn  
Records

34-4

2-25-98	West from T sec cor	19, 20, 29, 30	
Jim Jerry Kevin	000 - T sec cor - point 173		△
	BS 178	AR 87.1332	
	900.15'		
	2158.97'		
	2533.00	middle of N-S creek approx	
	2665.849'	Set T 1/4 corner	
3-2-d 3-2-98	South from T sec cor	29, 30, 31, 32	
Steve Jerry Kevin	000 - T sec cor BS 182	AR 86.0014	X
	377.04'		
	738.88'		
	879.19'		
	2179.41'		
	2324.84	S side of E-W ridge	
	2637.817	T 1/4 in Cedar/Willow Swamp	
	3600.00'	middle of E-W road	
	3980.5"		
	4384 -	creek	From records
	4589.86'		
	5035.35'	Turned Def Cr + 00°14'	
		a dist of 241.56'	
		section corner	
		missed by 1' to East	



		wea from Glenix	Bl 32 T34N-R4E
		and 5-6	T33N-R4E
○	2-11-94	Jim	000 - Granite
○		Jerry Kevin	834.91'
			In Perm records
			1100 cross E-W grade
			1228.50'
○	2-17-94		1320.00' T 1/16
		Steve Jerry Kevin	2263.24' -
			2640.00' T 1/4
			wea + piece Ash Slate
			3032.72'
			3539.61'
	2-18-94		3960.00' T 1/16
○		Steve Jerry Kevin	4197.84'
			4835.14'
○			5338.03' def $\angle$ left $16^{\circ} 50'$
			adist of 133.20'
○			to IP
			missed IP by 38' to North

24-94 Jim Terry Kevin	34-4	West from point 216	
000		Point 216	
205.43		T 1/16 cor. S 1/16 SW 32	
316.29			
1342.19		Deflect 0° 11'	
		In Perm records a dist of 185.59'	
		to granite marked	
		East from point 216	
		000 - Point 216	
		910' N-S grade	
2011-94 Jim Terry Kevin		1022.32' Deflect 26° 36'	
		a dist of 141.32' to IP	
		1114.45' - In creek - no corner set	
		1447.57	
		2434.33' T 1/16 corner S 1/16 E 32	
		3175.25' on grade	
		Deflect 4° 17'	
		dist 2607.00' to P section 32, 33	

2-11-05 set on 21 BS 22 x  
 steel  
 Kevin 000 - point 21 AR 103.1525  
 = 348.80 - Set T<sup>1/4</sup> corner between  
 20229

Tr Ann record

East between 21 & 28 x  
 2-28-98 000 - Tsec corner 20-21-28-29  
 steel Kevin RS 172 AR 269.1325  
 Kevin 590 - center of Secondary loop Rd  
 729.43'  
 1683.31'  
 2267.21' on N-slope of high ground  
 2660.530 - set T<sup>1/4</sup> corner in 2 ash  
 Point 207

2-25-98 2888.92' east edge of swamp  
 steel Kevin 3638.51'

3960.00'  
 4098.16'  
 on line 4485.96' Def Lt 2 097'

a dist of 354.26' small  
 Def Lt 30 55'  
 a dist of 482.42' to  
 sec cor 21, 22, 27, 28

SOUTH FRONT N 1/4 SEC 15  
T34N R4E

FENCE POST & PAINTED (3)  
24 APR 72

	N 1/4	CORRECTIONS
0 + 00.00		
6 + 19.94	=	1.42 ✓
10 + 89.28	=	1.75 ✓
17 + 26.76	=	1.16 ✓
22 + 24.66	=	1.49 ✓
27 + 92.55	=	1.87 ✓
34 + 12.43	=	2.29 ✓
41 + 97.48	=	2.81 ✓
46 + 91.39	=	3.14 ✓

52 + 25.60 DEF L. LT. 4° 52' A DIST.  
OF 35.65' S 1/4 15 22

7 = 3.50' SET G & W POST  
OF STONE ON T. LINE  
G & W POST SET 30.0' NORTH

G & W POST SET 30.0' NORTH  
OF SEC COR 14, 15, 22 & 23  
T34N R4E



10-34-4

18 AUG 71

SET SEC COR TO 9, 10, 15, &amp; 16 (4)

✓ B.T. POpAL 7" N 82°W 32.15'  
B.M. S 44°E 25.00'

8" BELOW SURFACE OF BRIDGE RD.

G&amp;W Post 22' E. on T.L.

SET 1/4 BET 15 &amp; 16

✓ B.T. POpAL 9" N 36°W 33.8'  
PopAL 12" S 44°W 36.2'

8" BELOW SURFACE OF BRIDGE RD.

G&amp;W Post 300' E. on T. LINE 25 AUG 71

SET 1/4 BET 15 &amp; 22

✓ B.T. POpAL 8" N 34°E 38.10'  
PopAL 12" S 42°E 47.10'

8" BELOW SURFACE OF 1/2 Mile RD.

SET SEC COR 14, 15, 22 &amp; 23

B.T. POpAL 9" S 20°W 39.50'

✓ POpAL 8" S 20°E 38.0'

8" BELOW SURFACE OF 1/2 Mile RD.

SET SEC COR 15, 16, 21 &amp; 22

✓ B.T. Maple 5' S 70°W 32.5'

ELECTRIC POLES N 40°E 47.0'

G&amp;W Post 25' W. on T. Line

DIETZSEN NO. 9887-9

3/11/72

✓ SET 1/4 COR BET 9 E 10 34-4

B.T. 7" BALSAM N 16° W 5.20'

11" BALSAM S 70° W 21.20'

GEW POST 3' NE

10-34-4

7 SEPT 76

(2)

F From C/4  
BEARING740.03  
739.56  
0.47

000 C/4 SECOND

740.03

739.56'

13.19.02

1319.02

SET TEMP 1/16

1317.70'

1614.57

1613.36

1.32

2549.65

2547.90

286

2638.05

2630.10

1.32

284

BEARING TREES C/4

14" MAPLE

S 89° E

4.1'

25" ELM

N 11° E

65.9'

G&amp;W POST 7' NE

C S 1/2

12.5'

10" POPAL

N 5° E

~~14.8'~~ 2.00'

9' "

N 88° E

19.1'

G&amp;W POST 2.2' SOUTH

E/4

6" MAPLE

S 31° E

25.8'

5' "

S 56° W

17.5'

G&amp;W POST

2'

S.W.

8 Nov 71

10-34-4

②/4 To NE SEC COR (NORTH)

000

②/4

1025.84

1025.05

2226.29

2224.22

2654.00 DEF L  $47^{\circ}46'$  → 24.23'

2651.95

GE 1/6

9" Poplar N10°E 8.2'

4" " ~~N~~ E 56°E 6.2'

GEN Post 2' SOUTH

E 1/4 LINE

5" W Spruce S74°W 20.25'

28.30'

7" Poplar N36°E 6.85' <sup>6.75'</sup>

6.50'

GEN Post 2' SOUTH

NE SEC COR.

I.P. 5" DOWN IN Hwy "86"

GEN Post 35' SOUTH ON LINE

2 3/4" I.P. 34' SOUTH & NORTH

OF COR.

NW SEC COR

30" Spruce S47°E 63.8'

B.M. 8'x8" N68°W 77.0'

WH. CK BRKS GEN Post N48°W 49.0'

TO THE EAST FIRST SET 10 215 FROM SEC COR

7, 10 15 9/16	To 1/4" I.R.	(1)
BEARING	N 87° 55' E	
1431.88	SEC. COR	9, 10 15 1/16
2137.37	SECOND	1431.84
2406.10	2136.30	22' E. ON T. LINE
1432.18	2404.95	26 Apr 72

2691.11 5/4 SET HUB IN BEARER POND.

SET GEN POST 158.98' WEST ON T. LINE FROM 2" IRON PIPE IN B.P. FROM STATION 2406.10 TURNED  $\angle 90^{\circ} 19'$  TO NORTH, BEARING N 1° 48' W A DIST OF 500.88' TURNED  $\angle 90^{\circ} 19'$  TO EAST BEARING N 88° 57' E A DIST OF 239.96'

(TO COMPLETE OFFSET OF BEARER POND.) STATION TURNED  $\angle 90^{\circ} 19'$  TO NORTH BEARING N 1° 48' W

000	5/4	50" 1/4	IRON PIPE
500.88	SECOND	66	APR 14, 72
874.93			STEEL FENCE POSTS
1425.01		924.12	+ 500.88 = 1425.00
1866.55		1365.55	+ 500.88 = 1866.23
2658.69		2156.64	+ 500.88 = 2657.52

PAINTED & BEARER 26 APR 72

734N R4E

(1A)

TRAVERS OF BRIDGE, FOUR MILE, & '86."

SEC COR 15, 16, 21, & 22 INT. BRIDGE & FOUR MILE

E. DOWN FOUR MILE

000 - SEC COR

16+96.17 -

29+61.56 -

31+27.45 -

37+86.66

SET 5 1/16 SE 3875.66'

GEN POST 50' NORTH ON T.L.

DEF L LT 0°36'

15+13.87' To SEC COR 14, 15, 22, & 23

SET 1/4 COR AT 2650.22' 1/4 BET 15 & 22

SET 5 1/16 SE AT 1325.11 FROM SEC COR 14, 15, 21, & 23

SEC COR 15, 16, 21, & 22 INT. BRIDGE & FOUR MILE

N. UP BRIDGE RD.

000 - SEC COR L BET BRIDGE & FOUR MILE

86°34'

30+93.54 - L 1°33' DEF LT

22+13.59 - L 2°46' DEF RT

9+44.26 - L 3°21' DEF LT

15+43.59 - L 1°38' DEF RT

9+19.27 - L 2°25' DEF LT To SEC COR 34, 9 & 10

AT STATION 9+19.27 HAD TO TRAVERSE SPIRIT RIVER



SEC COR 3, 4, 9, E 10 INT. BRIDGE & S.F. RD.

000 - SEC COR 2 BET BRIDGE & S.F.

RD. 87°42'

7+47.98 - L 31°26' DEF LT

2+67.56 - L 29°52' DEF LT

6+17.08 - L 13°20' DEF RT

7+97.82 - L 104°50' INT. LT

12+94.19 - L 13°56' DEF LT

2+70.12 - L 11°20' DEF RT

5+71.18 -

13+95.52 - L 148°42' INT RT

7+01.70 - L 1°59' DEF RT

62.24' TO SEC COR 2, 3, 10, E 11

01267

10 JUN 85

SOUTH FARM SITE COR  
 39.31734N BYC 29.836 STEAK  
 T34N R3E RECAPS  
 000 - SITE COR

BT. 10" S MAPLE S40W 32.8  
 10" CUMM S14E 45.2  
 145.55 (199' 10" B.M.S.H. N10W 45.15'  
 572.17 ASH STUMP 3" (7.82)  
 1282.52 (17.53)  
 1442.60 (19.72)  
 1550.45 BIRCH STUMP 5" (21.19)  
 1778.04 (24.84)  
 2620.02 ASH STUMP 10" -  
 2894.65 (37.30)  
 3331.91 MAPLE STUMP 3" (45.55)  
 4187.85 (57.29)  
 5115.75 TURNED DEE L RT 28-33' 98'  
 A DIST OF 151.42' TO (67' 98')

SFC COR  
 BT.  
 12" S MAPLE N80E 12.41  
 10" S MAPLE S23E 29.23  
 10" H MAPLE N15W 17.85

SYSTEM NO. 0089



BT

W/1/1 NAJ

8" B Ash N17°W 17.5'

10' Hemlock N84°W 5.0'

30' South To KOK LONE

W/1/1

10" B Ash S33°W 9.80'

6" " N21°E 8.10'

7" " S55°E 10.20'

W/1/6 SAJ

5" H Maple N72°E 9.10'

4" H Maple S60°W 14.45'

T33N R7E