
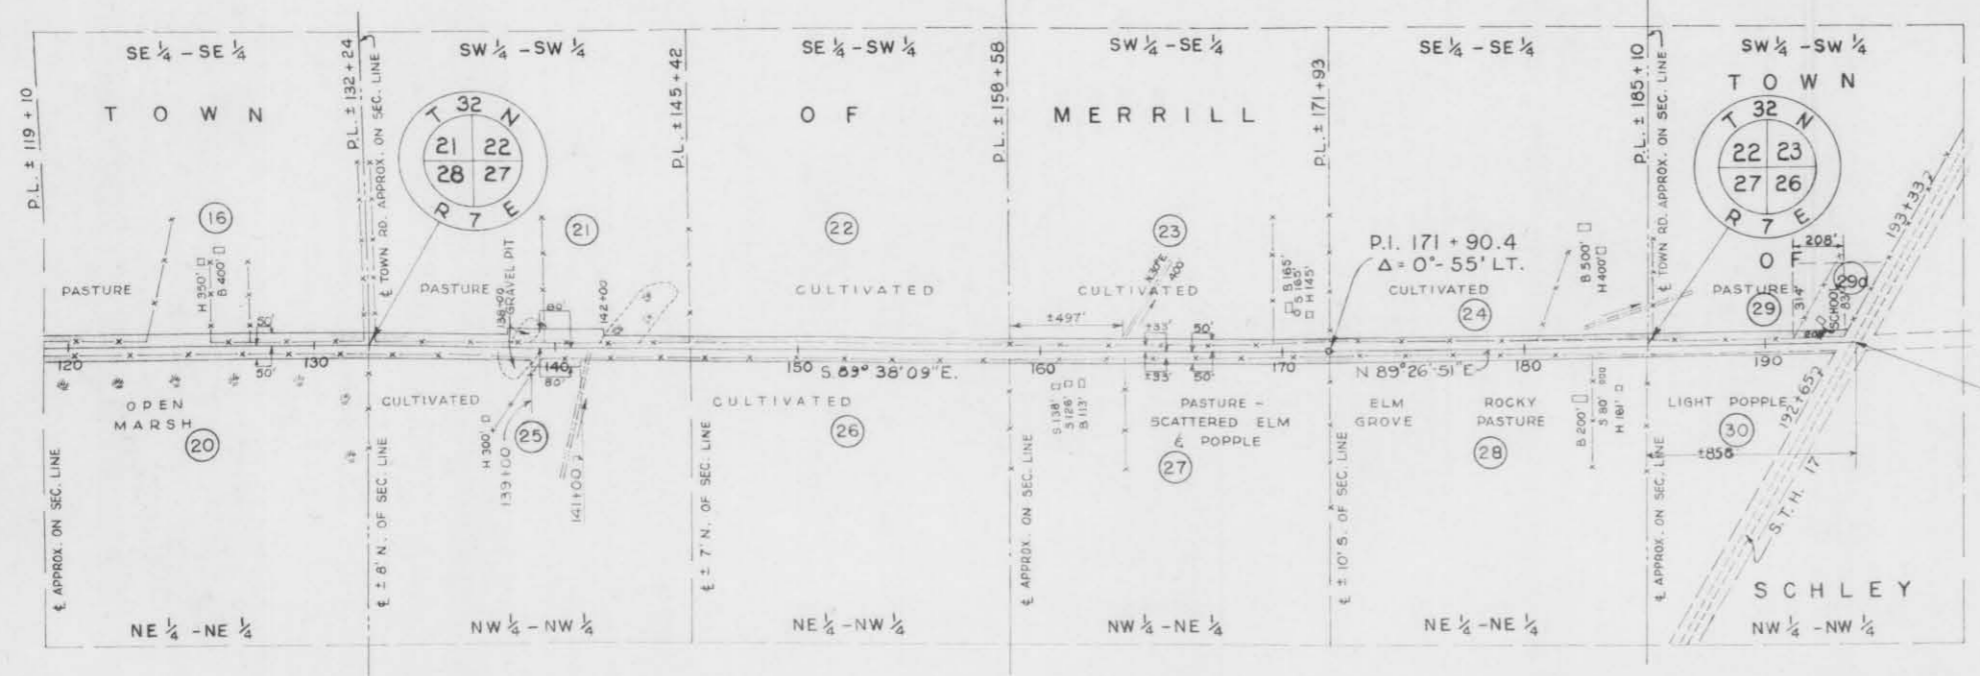
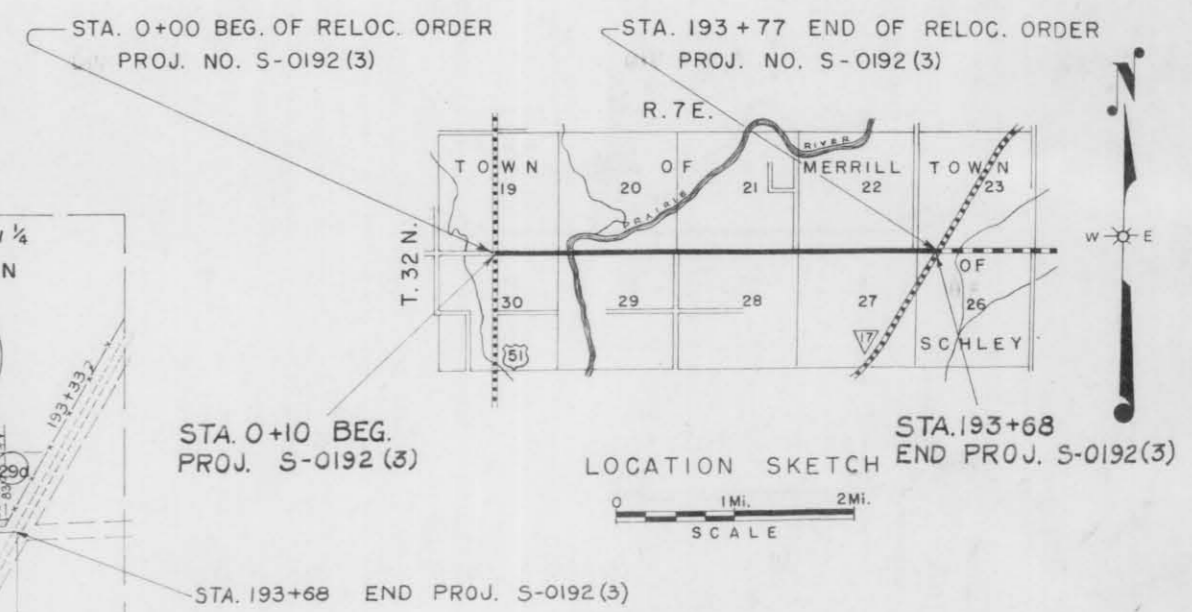


COUNTY AND HIGHWAY	ROUTE AND SECTION	CLASS AND AGREEMENT		FEDERAL DIVISION OFFICE	SHEET NUMBER	TOTAL SHEETS
		STATE	FEDERAL			
35.6	192.0		11.2	WIS. 5N	4	51

STA. 0+10 BEGINNING PROJ. S-0192(3)

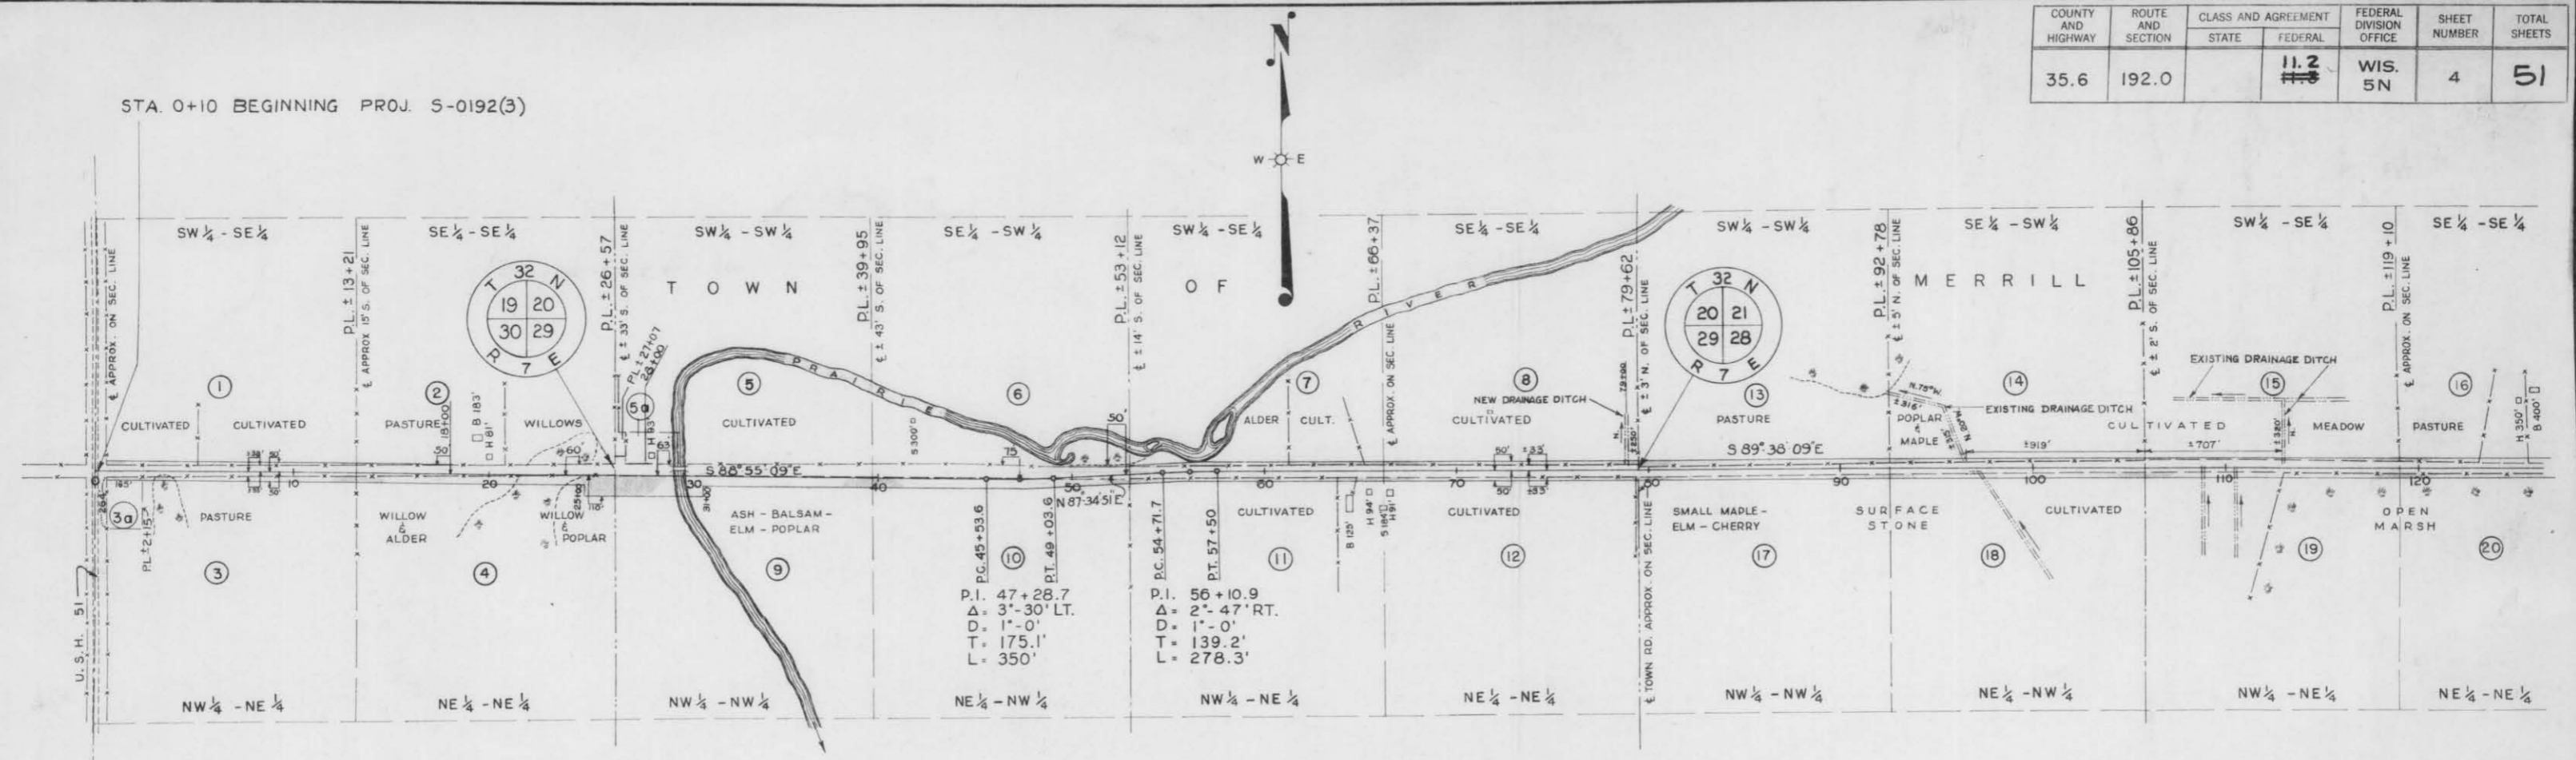

STATE HIGHWAY COMMISSION OF WISCONSIN
 PLAT OF RIGHT OF WAY REQUIRED
 PROJECT NO. S-0192(3)
 U.S.H. 51 - S.T.H. 17 ROAD
 C.T.H. NO. "C" LINCOLN COUNTY

SCALE
 0 400' 800'

LENGTH = 3.666 MILES DATED 3-10-48


COUNTY AND HIGHWAY	ROUTE AND SECTION	CLASS AND AGREEMENT		FEDERAL DIVISION OFFICE	SHEET NUMBER	TOTAL SHEETS
		STATE	FEDERAL			
35.6	192.0		11.2	WIS. 5N	41	51

SCHEDULE OF LAND AND INTERESTS REQUIRED											
PAR. NO.	OWNER	ADDRESS	MORTGAGE	ADDRESS	DESCRIPTION	ACRES REQUIRED				INTERESTS REQUIRED	PAR. NO.
						MARSH	IMPR.	UNIMPR.	TOTAL		
1	MIKE KAHLAUSKAS AND MARY KAHLAUSKAS, HIS WIFE	R. 3, MERRILL	NONE		SW. SE. SEC. 19, T.32N., R.7E.		0.39		0.39		1
2	SARAH TERESA BARRETT & DOROTHY C. BARRETT, MOTHER & DAUGHTER IN JOINT TENANCY	502 N. CENTER AVE. "	"		SE. SE. " " " "		0.06		0.06		2
3	HERMAN F. LUTZKE & OLGA C. LUTZKE HIS WIFE	R. 3, "	"		NW. NE. SEC. 30 (EXC. NW. 1 ACRE) " "		0.55		0.55		3
3a	JOHN GODFREY GOULD AND ADELA BERTHA GOULD, HUSBAND AND WIFE, OR SURVIVOR.	CARE OF LEO GOULD CONS. DEPT. "	"		NW. 1 ACRE NW. NE. SEC. 30 " "		0.06		0.06		3a
4	R. WENDELL BARRETT	R. 3, "	"		NE. NE. " " " "	0.28		1.14	1.42		4
5	MIKE KAHLAUSKAS AND MARY KAHLAUSKAS, HIS WIFE	R. 3, "	"		SW. SW. (EXC. PAR. NO. 5a) SEC. 20 " "		0.00		0.00		5
5a	FREDERICK A. DOEPKE AND LEONE H. DOEPKE, HUSBAND AND WIFE, JOINTLY.	" "	"		PORTION SW. SW. " " " "		0.00		0.00		5a
6	MARGUERITE HESTERMAN (SEE MR. O. HESTERMAN,	1003 MAIN ST.) "	"		SE. SW. " " " "				-0-		6
7	WENDELL BARRETT AND ANNA BARRETT HIS WIFE	R. 3, "	DOROTHY C. BARRETT	502 N. CENTER AVE. MERRILL	SW. SE. " " " "		0.46		0.46		7
8	" " " " " " " "	" "	NONE		SE. SE. " " " "		0.51		0.51	DRAINAGE DITCH EASEMENT	8
9	MARGARET MARY EBERT, ARTHURA M. EBERT KREMBS, JOAN MAHON (1/3 INT. TO EACH)	C/O MRS. EMIL KREMBS 300 LAKE ST. "	"		NW. NW. SEC. 29 " "			2.05	2.05		9
10	DO.	DO. "	"		NE. NW. " " " "		1.68		1.68		10
11	GORDON GOSPILL	R. 3, "	"		NW. NE. " " " "		0.58		0.58		11
12	DO.	DO. "	"		NE. NE. " " " "		0.51		0.51		12
13	DO.	DO. "	"		SW. SW. SEC. 21 " "		0.63		0.63		13
14	CHARLES W. IWEN & LILLIAN IWEN, HIS WIFE	R. 3, "	"		SE. SW. " " " "		0.54		0.54	DRAINAGE DITCH EASEMENT	14
15	WESLEY STRUM & BERDINA STRUM HIS WIFE, JOINTLY	R. 3, "	"		SW. SE. " " " "		0.47		0.47	DRAINAGE DITCH EASEMENT	15
16	SAM DAHL & ANNA DAHL HIS WIFE, JOINTLY	402 COTTAGE ST., "	"		SE. SE. " " " "		0.64		0.64		16
17	BARNEY P. WYLAND	1400 RIVER ST., "	"		NW. NW. SEC. 28 " "			0.39	0.39		17
18	JOHN KRAUSE	R. 3, "	(DELINQUENT TAX 1942-1946)		NE. NW. " " " "		0.48		0.48		18
19	WESLEY STRUM & BERDINA STRUM HIS WIFE	R. 3, "	NONE		NW. NE. " " " "	0.28	0.28		0.56		19
20	DO.	DO. "	"		NE. NE. " " " "	0.37			0.37		20
21	FRANK A. JOHNSON & ERNA E. JOHNSON, HUSBAND & WIFE, JT.	R. 3, "	"		SW. SW. SEC. 22 " "		1.00		1.00		21
22	ROY A. BLAIR & RUTH M. BLAIR, HUSBAND & WIFE, JOINTLY	R. 3, "	CORA P. MORRIS	MERRILL	SE. SW. " " " "		0.63		0.63		22
23	DO.	DO. "	DO.	"	SW. SE. " " " "		0.39		0.39	DRAINAGE DITCH EASEMENT	23
24	GEORGE PLAMANN & HATTIE PLAMANN, HUSBAND & WIFE, JT.	R. 3, "	E.M. SELOVER, MERRILL & FED. FARM MTG. CORP., ST. PAUL, MINN.		SE. SE. " " " "		0.34		0.34		24
25	PAUL HENKELMAN & OTILLIE HENKELMAN, HUSBAND & WIFE, JOINTLY	R. 3, "	J.L. SELOVER	"	NW. NW. SEC. 27 " "		0.43		0.43		25
26	DO.	DO. "	DO.	"	NE. NW. " " " "		0.39		0.39		26
27	BEN ARGUST & MAMIE ARGUST, HUSBAND & WIFE, JOINTLY	1812 WATER ST. "	EDWARD RAASCH & LYDIA RAASCH, HUSBAND & WIFE & SURVIVOR		NW. NE. " " " "		0.62		0.62		27
28	PETER MUSCH & VIOLA MUSCH, HUSBAND & WIFE, JOINTLY	R. 3, "	FARM SEC. ADM., DEPT. OF AGRICULTURE	MILWAUKEE	NE. NE. " " " "		0.68		0.68		28
29	GEORGE PLAMANN & HATTIE PLAMANN, HUSBAND & WIFE	R. 3, "	NONE		PORTION SW. SW. SEC. 23 " "		0.22		0.22		29
29a	JOINT SCHOOL DIST. 7, TNS. MERRILL & SCHLEY	R. 3, "	"		PORTION SW. SW. " " " "		0.07		0.07		29a
30	RAYMOND G. SAYER & LAURA D. SAYER, HUSBAND & WIFE, JT.	C/O WAUSAU LBR. & SALES	"		NW. NW. SEC. 26 " "			0.31	0.31		30





NOTE: ACQUIRE EASEMENTS FOR HIGHWAY PURPOSES EXCEPT AS OTHERWISE SPECIFIED.

NB. 8188

STATE HIGHWAY COMMISSION OF WISCONSIN
 PLAT OF RIGHT OF WAY REQUIRED
 PROJECT NO. S-0192(2)
 U.S.H. NO. 51 - S.T.H. NO. 17 ROAD
 C.T.H. NO. C LINCOLN COUNTY

SCALE


LENGTH = MILES DATED 3-10-48

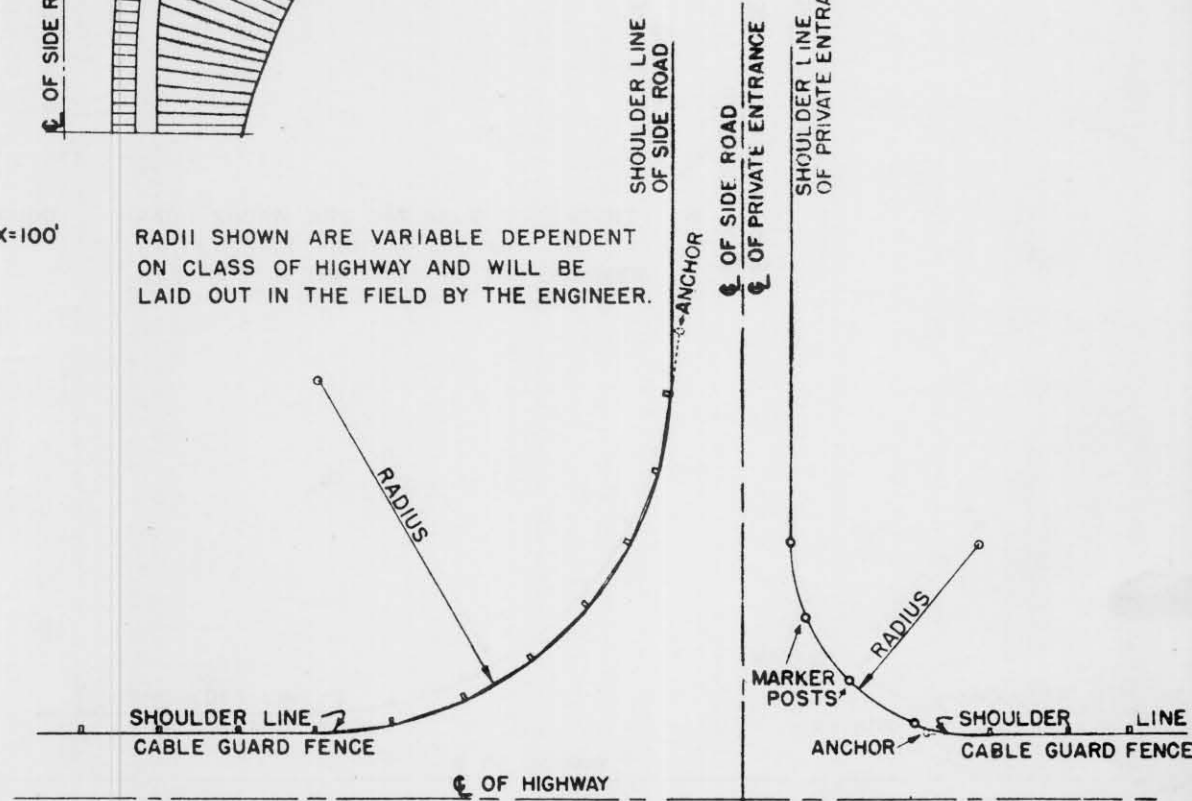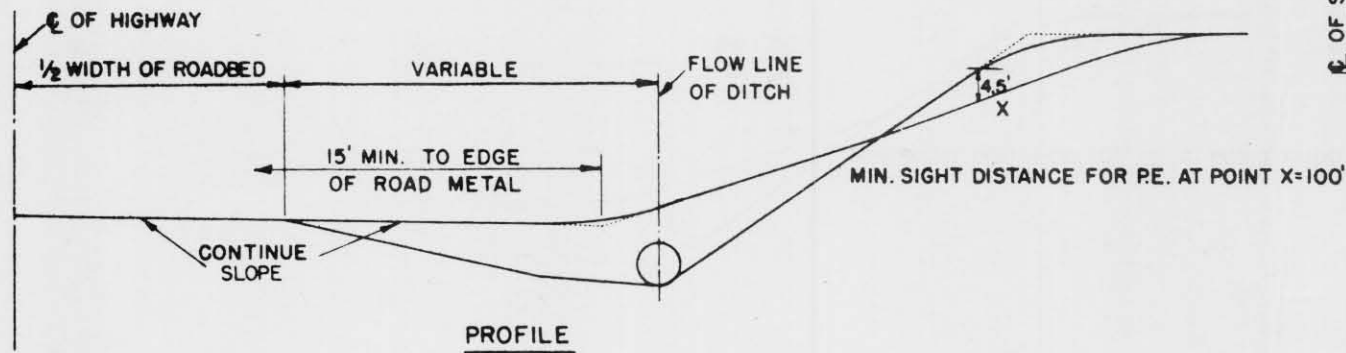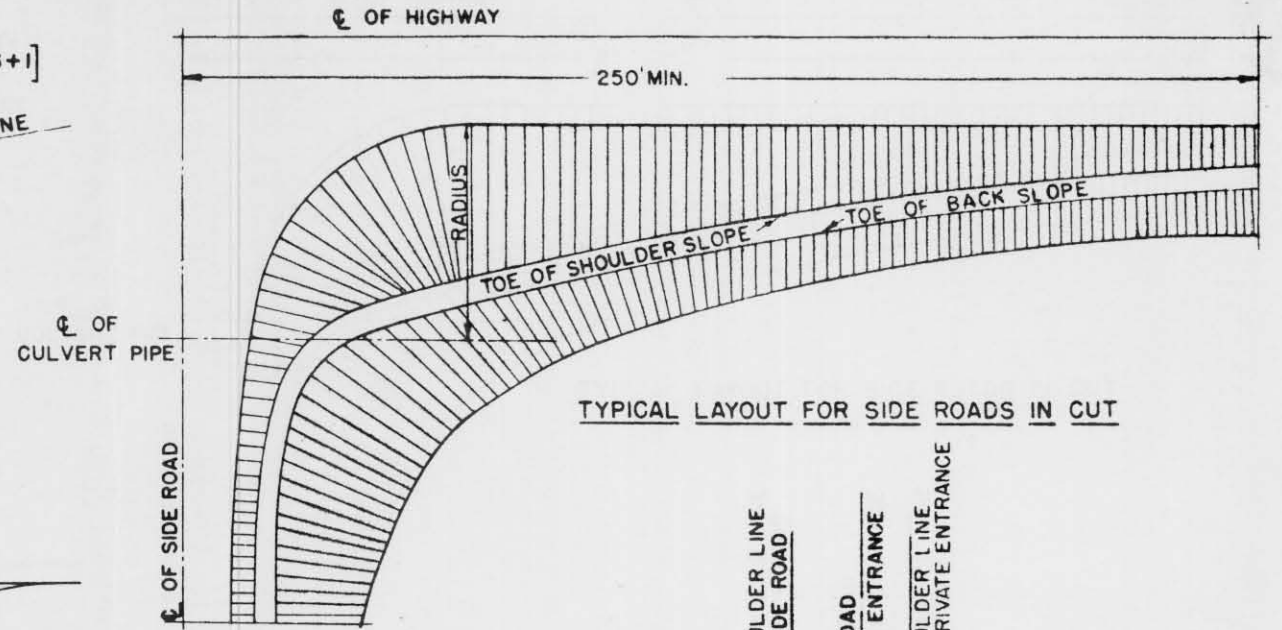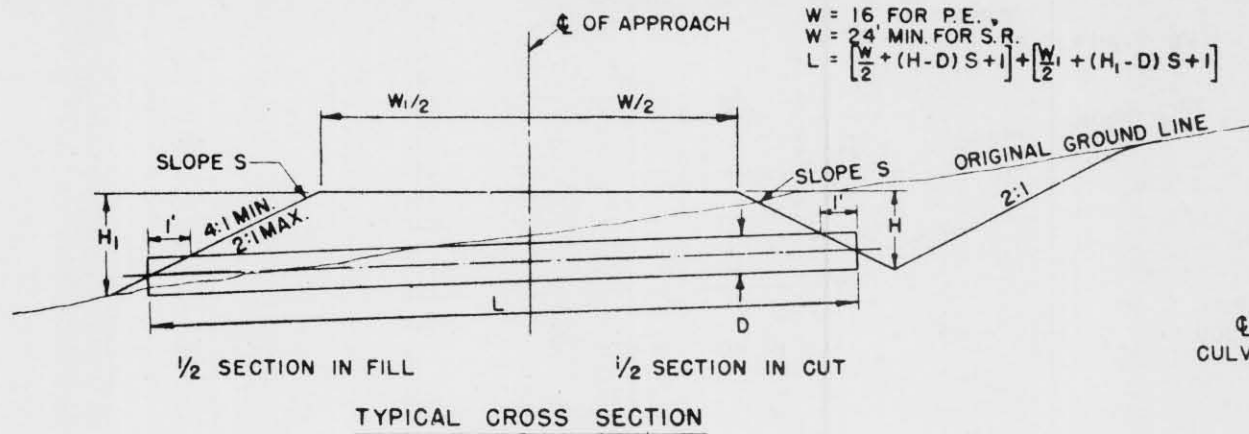

RADI SHOWN ARE VARIABLE DEPENDENT ON CLASS OF HIGHWAY AND WILL BE LAID OUT IN THE FIELD BY THE ENGINEER.

DETAILS OF PRIVATE ENTRANCE AND SIDE ROAD APPROACHES

STATE HIGHWAY COMMISSION OF WISC.

RECOMMENDED FOR APPROVAL:


Frank Crow
DESIGN ENGINEER

M. Plute
CONSTRUCTION ENGINEER

DATE OCT:1, 1945

APPROVED: *P. H. Roush*
STATE HIGHWAY ENGINEER


DRAWN CHECKED

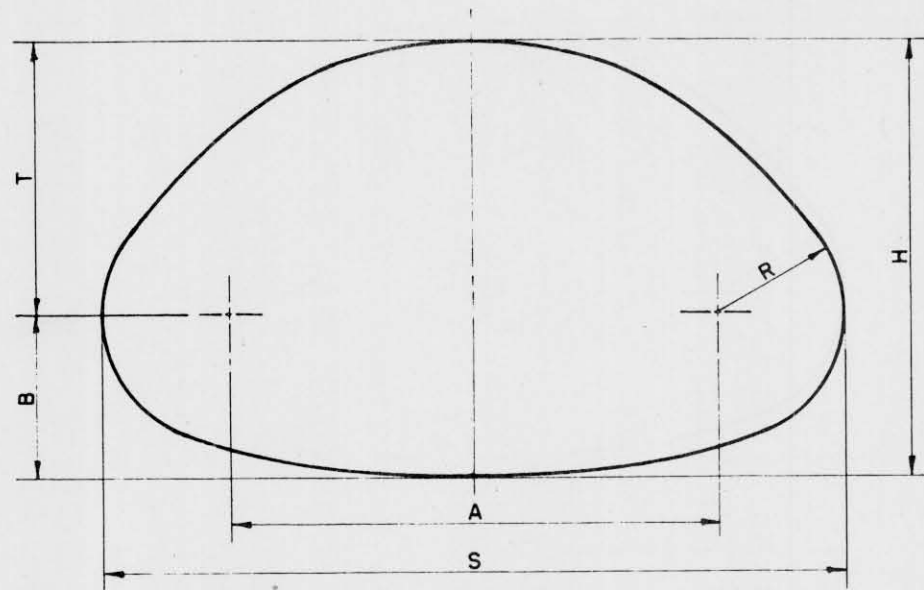

**CORRUGATED GALVANIZED SHEET METAL
PIPE ARCH
(RIVETED)**

GAUGE	S SPAN (IN.)	H HEIGHT (IN.)	AREA (SQ. FT.)	R (IN.)	T (IN.)	B (IN.)	A (IN.)
16	18	11	1.1	4	6½	4½	10
16	22	13	1.6	4	8¼	4¾	14
14	29	18	2.8	4½	12½	5½	20
14	36	22	4.4	5	15¾	6¼	26
12	43	27	6.4	5½	20	7	32
12	50	31	8.7	6	23	8	38
12	58	36	11.4	7	26¾	9¼	44
12	65	40	14.3	8	29½	10½	49
10	72	44	17.6	9	32¼	11¼	54

NOTE: ALL DIMENSIONS MEASURED FROM INSIDE
CRESTS OF CORRUGATIONS.

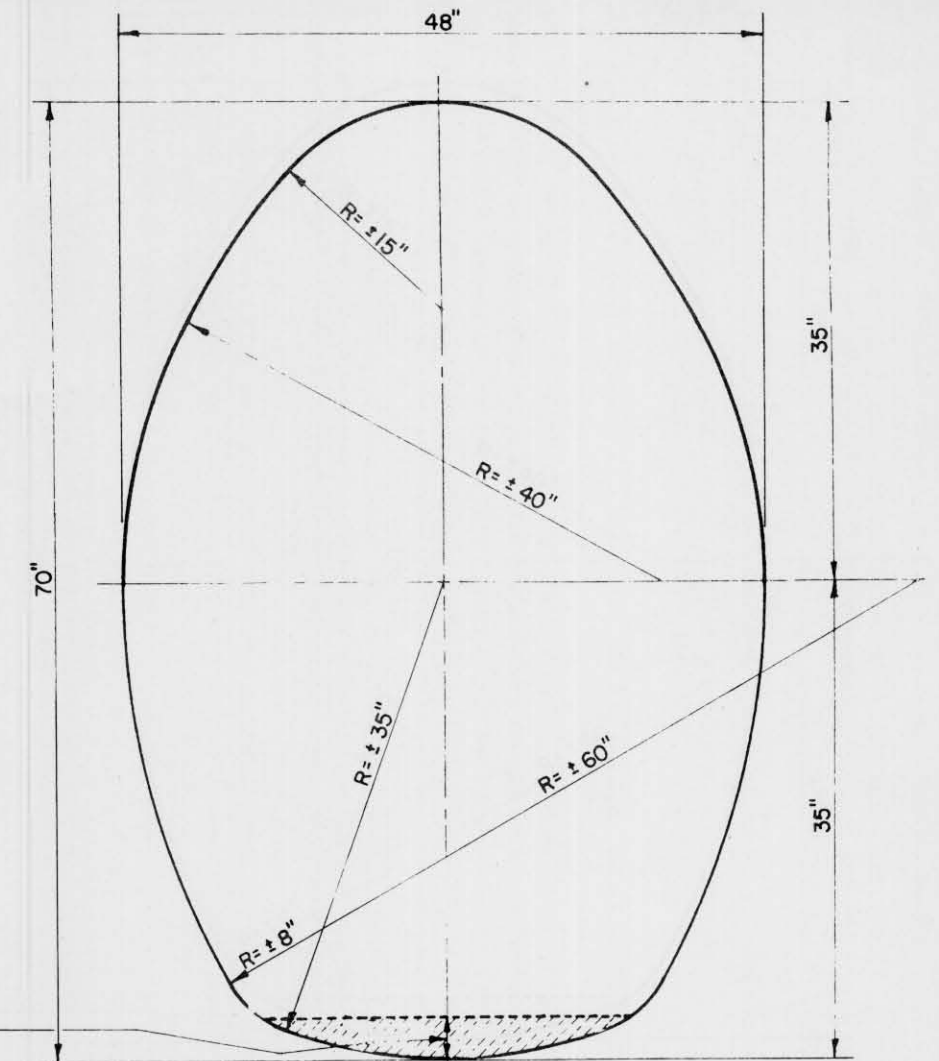

3" BITUMINOUS SURFACING
DENSE GRADED TYPE
SC, MC, RC OR RT BITUMINOUS
MATERIALS.

**CORRUGATED GALVANIZED SHEET METAL
PIPE CATTLE PASS
NO. 10 GAUGE**

CONSTRUCTION NOTE

DETAILS OF CONSTRUCTION NOT SHOWN SHALL CONFORM TO
THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS
AND THE APPLICABLE SPECIAL PROVISIONS.

TOLERANCE FROM THE DIMENSIONS DETAILING SIZE AND
SHAPE WILL BE PERMISSABLE PROVIDING EQUIVALENT CAPACITY
AND STRENGTH ARE OBTAINED.

**CORRUGATED GALVANIZED
SHEET METAL
PIPE ARCH & CATTLE PASS**

STATE HIGHWAY COMMISSION OF WISCONSIN

RECOMMENDED FOR APPROVAL


PLAN ENGINEER

C. J. Bluk 8/30/49
CONSTRUCTION ENGINEER

APPROVED:


DRAWN L.J.D.
CHECKED

E. W. Rostky 9/30/49
STATE HIGHWAY ENGINEER

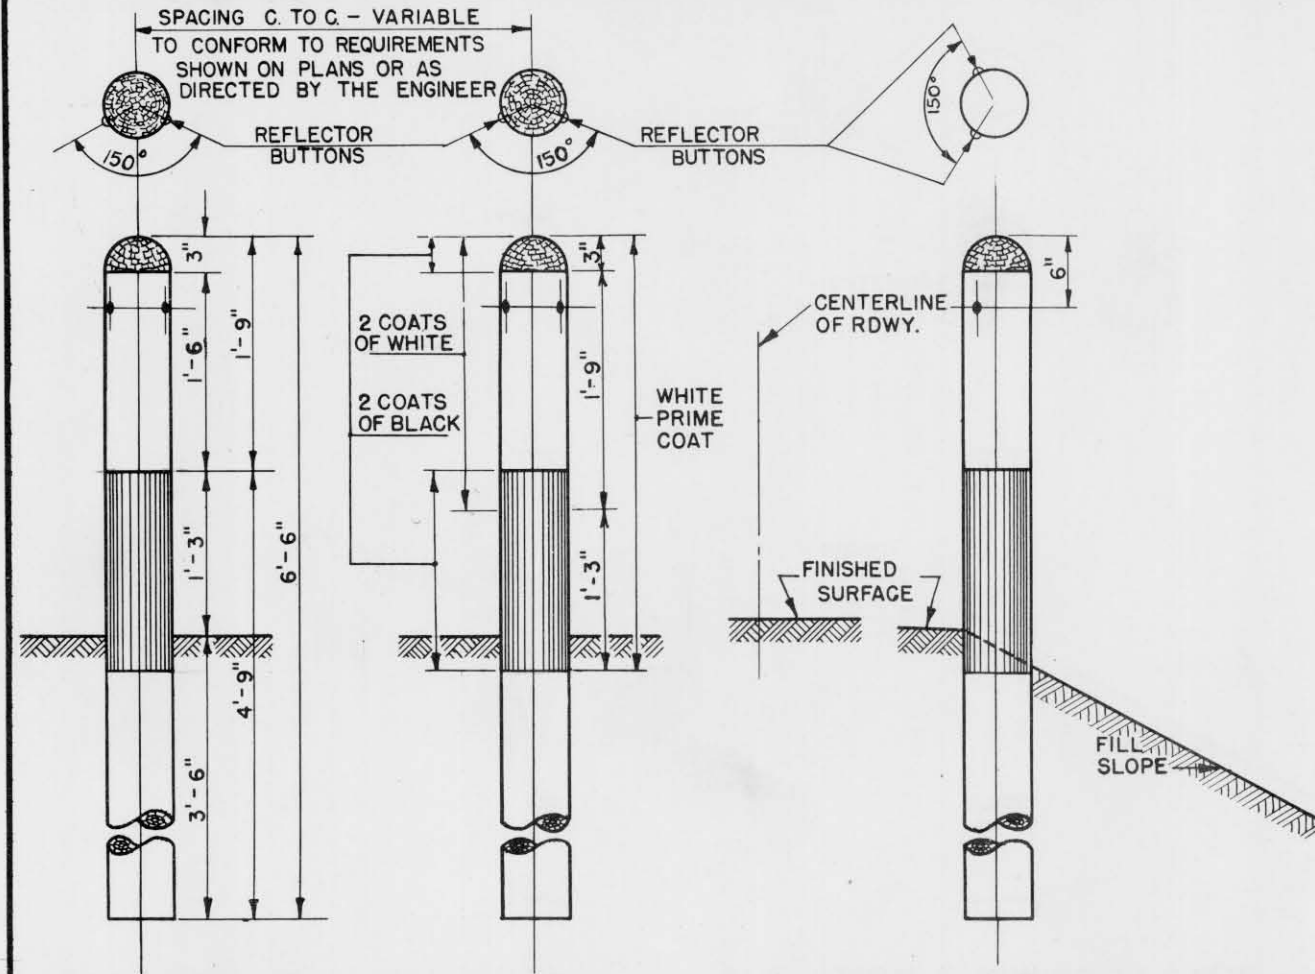


ELEVATION SHOWING SPACING

ELEVATION SHOWING LOCATION ON ROAD SHOULDER

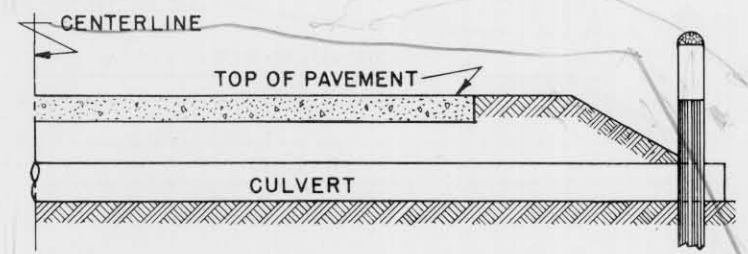

SECTION WITH CULVERT MARKER

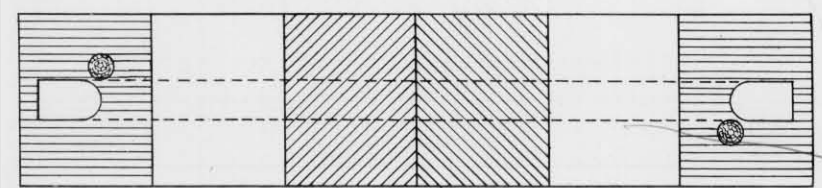

PLAN SKETCH

SPACING OF MARKER POSTS FOR VARYING LENGTHS OF SHOULDER TO BE PROTECTED.

- 100 FT. TO 500 FT. ----- 50 FT.
- 500 FT. OR MORE ----- 100 FT.
- SEE MISCELLANEOUS QUANTITY SHEET OF PLANS.

GENERAL NOTES

CONSTRUCTION DETAILS NOT SHOWN HERE SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.

POSTS SHALL BE 6" CONFORMING TO THE REQUIREMENTS OF SECTION 4124

REFLECTOR BUTTONS SHALL BE SIZE NO.1 CRYSTAL, FOR WOOD MOUNTING. DRILL MOUNTING HOLE TO FIT BUTTON (GENERALLY 7/8" DIAMETER.)



WHERE CABLE GUARD FENCE OR MARKER POSTS ARE USED THE CULVERT MARKER POST SHOULD BE OMITTED.

MARKER POST AS CULVERT MARKER TO BE PLACED AT BOTH ENDS OF CULVERT ON NEAR SIDE OF CULVERT. NO REFLECTOR BUTTON REQUIRED.

MARKER POSTS	
FOR	
SHOULDER DELINEATION AND CULVERTS	
STATE HIGHWAY COMMISSION OF WISC.	
RECOMMENDED FOR APPROVAL:	
<i>Frank Crav</i>	DESIGN ENGINEER
<i>W. Bluh</i>	CONSTRUCTION ENGINEER
DATE	
APPROVED:-	OCT. 1, 1945
DRAWN C.A.L.	<i>E.L. Raitim</i>
CHECKED D.F.C.	DATE STATE HIGHWAY ENGINEER


SECTION OF SNOW FENCE TO BE PAINTED ALTERNATELY BLACK AND YELLOW AS SHOWN BELOW.
 LENGTH TO BE SUFFICIENT TO REACH FROM TOE OF THE BACKSLOPE TO TOE OF THE BACKSLOPE.
 PROVIDE SUFFICIENT NUMBER OF INTERMEDIATE POSTS TO ADEQUATELY SUPPORT THE FENCE.

STANDARD "ROAD CLOSED" SIGN (W.H.C.- NO. R-15) TO BE ERECTED ON FENCE AT THE TOP ON
 THE CENTERLINE OF ROAD. SIGN WILL BE FURNISHED BY COMMISSION.

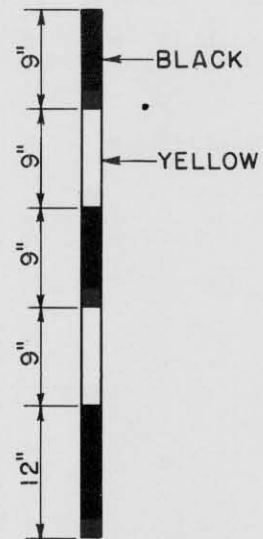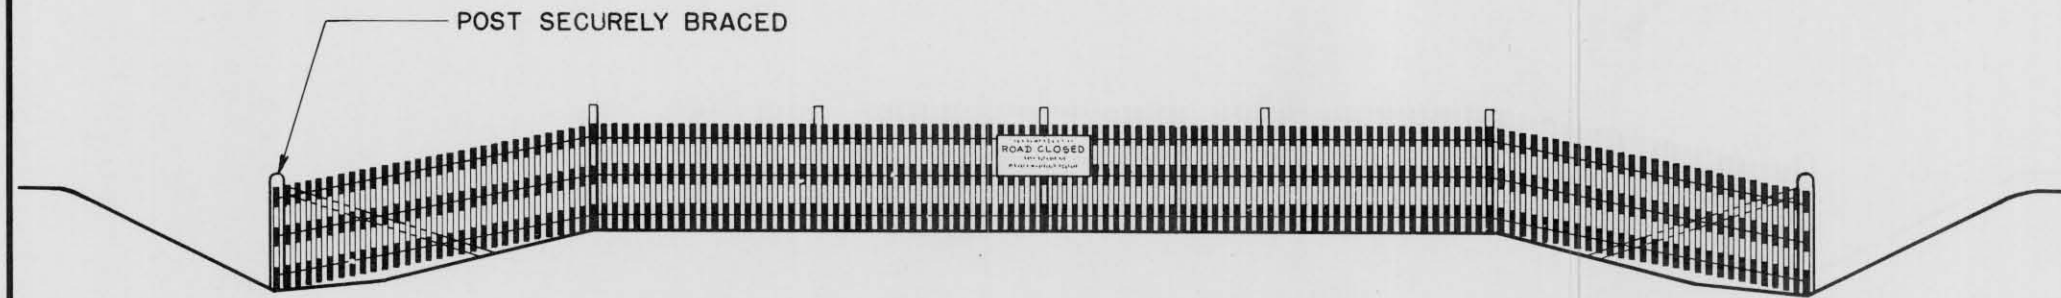

DETAIL SHOWING METHOD OF STRIPING
 FOR 4' SNOW FENCE.

STATE HIGHWAY COMMISSION OF WISCONSIN	
CONSTRUCTION BARRICADE	
RECOMMENDED FOR APPROVAL:	
<i>Frank Crase</i> DESIGN ENGINEER	
<i>W. Bluh</i> CONSTRUCTION ENGINEER	
APPROVED:-	
DRAWN <u>HM</u> CHECKED <u>WHG</u>	DATE <u>OCT. 1, 1945</u> <i>E. G. Rettig</i> STATE HIGHWAY ENGINEER

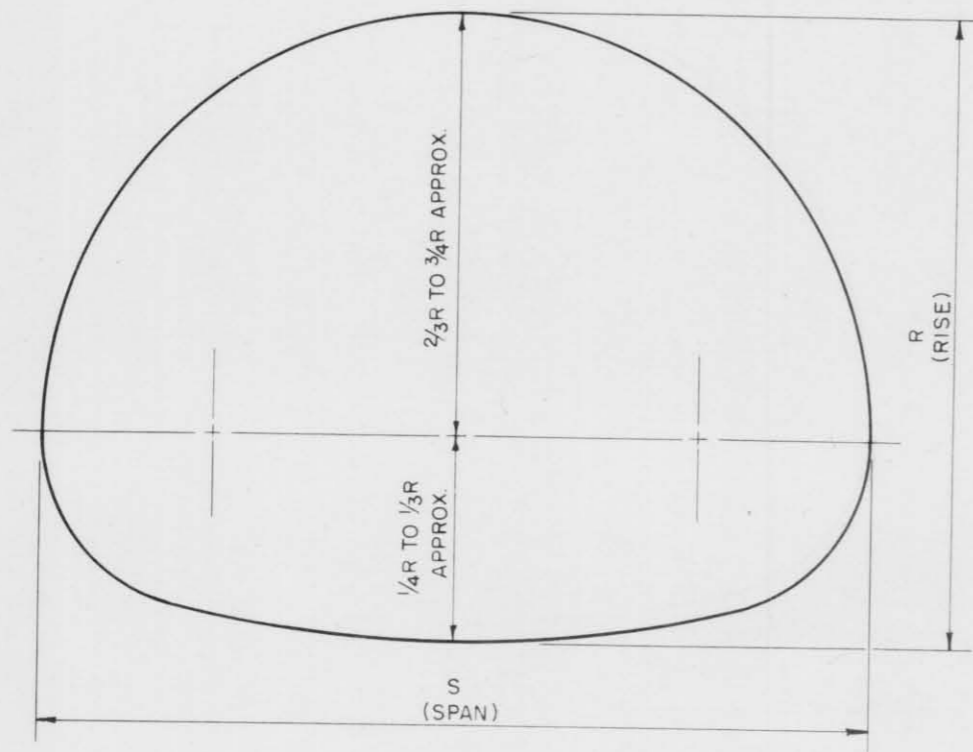

SECTIONAL PLATE PIPE ARCH

SPAN (FT.)	AREA (SQ. FT.)	R/S	* MINIMUM GAGES HEIGHT OF COVER IN FT.			
			2-3	4-5	6-7	8-10
6	24	.72	10	10	10	10
8	33	.68	8	10	10	7
9	40	.65	8	8	8	5
10	55	.65	7	7	5	3
12	70	.65	5	5	5	1
13	85	.63	1	3	3	1
14	95	.63	1	1	3	1
15	110	.63	1	1	1	1

*H-15 LOADING

NOTE: ALL DIMENSIONS MEASURED FROM INSIDE
CRESTS OF CORRUGATIONS.
MINIMUM DEPTH OF CORRUGATIONS SHALL NOT
BE LESS THAN 1/2 INCHES.

CONSTRUCTION NOTES

SPAN LENGTHS SHOWN IN TABLE ARE MINIMUM, AREA IS APPROXIMATE AND THE RATIO OF RISE TO SPAN SHALL HAVE A TOLERANCE OF 5%, PLUS OR MINUS.

BOTTOM AND CORNER PLATES SHALL BE AT LEAST TWO GAGES HEAVIER THAN INDICATED EXCEPT THAT NO INCREASE IS REQUIRED FOR NO. 1 GAGE.

DETAILS OF CONSTRUCTION NOT SHOWN SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.

**SECTIONAL PLATE
PIPE ARCH**

STATE HIGHWAY COMMISSION OF WISCONSIN

RECOMMENDED FOR APPROVAL:

PLAN ENGINEER

A. J. D.
CONSTRUCTION ENGINEER

APPROVED:

DRAWN L.J.D.
CHECKED

E. R.
STATE HIGHWAY ENGINEER